DUNDAS PUBLIC SCHOOL SCHOOL INFRASTRUCTURE NSW LANDSCAPE DOCUMENTATION

DRAWING REGISTER

DRAWING NUMBER	DRAWING NAME	SCALE / SIZE	REVISION
DUPS-GIL-00-00-DR-L-0001	COVER SHEET	_	G
DUPS-GIL-00-00-DR-L-2001	LANDSCAPE MASTER PLAN	1:200 @ A1	А
DUPS-GIL-00-00-DR-L-3001	LANDSCAPE PLAN	1:100 @ A1	Р
DUPS-GIL-00-00-DR-L-6001	PLANTING PLAN	1:100 @ A1	В
DUPS-GIL-00-00-DR-L-9001	LANDSCAPE DETAILS	1:20 @ A1	С

PLANT SCHEDULE

CODE	BOTANICAL NAME	COMMON NAME	MATURE HEIGHT	NATIVE	INSTALL SIZE	SPACING	QUANTITY
TREES		I			1		
LAG BIL	LAGERSTROEMIA INDICA X FAURIEI 'BILOXI'	CREPE MYRTLE	5-8M		200L BAG	AS SHOWN	1
LAG TUS	LAGERSTROEMIA INDICA X FAURIEI 'TUSCARORA'	CREPE MYRTLE	5-8M		200L BAG	AS SHOWN	2
SHRUBS						-	
ACM SMI	ACMENA SMITHII 'MINOR'	LILLY PILLY	2-4M	\checkmark	300MM POT	AS SHOWN	10
BAN BIR	BANKSIA 'BIRTHDAY CANDLES'	HAIRPIN BANKSIA	1M	\checkmark	200MM POT	AS SHOWN	114
CAL GRE	CALLISTEMON GREEN JOHN	BOTTLEBRUSH	0.6-1M	\checkmark	200MM POT	AS SHOWN	129
SYZ AUS	SYZYGIUM AUSTRALE 'RESILIENCE'	LILY PILLY	2-4M	\checkmark	300MM POT	AS SHOWN	8
GROUNDCOVE	RS & GRASSES						
CAR AUS	CARPOBROTUS 'AUSSIE RAMBLER'	PIGFACE	0.3M	\checkmark	140MM POT	6 / M ²	55
DIA LIT	DIANELLA 'LITTLE JESS'	FLAX LILY	0.4M	\checkmark	140MM POT	6 / M ²	82
LIR JUS	LIRIOPE 'JUST RIGHT'	LILY TURF	0.5M		140MM POT	7 / M ²	34
LOM LIT	LOMANDRA CONFERTIFOLIA 'LITTLE CON'	MAT RUSH	0.4M	\checkmark	140MM POT	6 / M ²	66
MYO PAR	MYOPORUM PARVIFOLIUM	CREEPING BOOBIALLA	0.2M	\checkmark	140MM POT	5 / M ²	90
TRA ASI	TRACHELOSPERMUM ASIATICUM ASIATIC JASMINE YELLOW STAF		0.15M		140MM POT	5 / M ²	58



NOTE	ISSUE	DATE	DESCRIPTION	DRAWN	CHECKED	DRAWING TITLE
	А	22.11.24	ISSUE FOR COORDINATION	QN	RL	
VERIFY ALL DIMENSIONS ON SITE BEFORE COMMENCING WORK. REPORT ALL DISCREPANCIES	В	25.11.24	ISSUE FOR 80% SCHEMATIC DESIGN	QN	RL	
TO LANDSCAPE ARCHITECT PRIOR TO CONSTRUCTION. FIGURED DIMENSIONS TO BE TAKEN IN PREFERENCE TO SCALED DRAWINGS. ALL WORK IS TO CONFORM TO RELEVANT AUSTRALIAN	С	11.12.24	ISSUE FOR 95% SCHEMATIC DESIGN	QN	RL	
STANDARDS AND OTHER CODES AS APPLICABLE. LOCATION OF UNDERGROUND SERVICES TO	D	18.12.24	ISSUE FOR 100% SCHEMATIC DESIGN	QN	RL	
BE PROVEN ON SITE AND PROTECTED IF NECESSARY PRIOR TO CONSTRUCTION. DIAL BEFORE	E	17.01.25	ISSUE FOR 100% SCHEMATIC DESIGN	QN	RL	
DU DIG. PLANT SPECIES AND QUANTITIES SHOWN ARE INDICATIVE ONLY AND ARE SUBJECT	F	05.02.25	ISSUE FOR 100% SCHEMATIC DESIGN	HI	RL	
TO CHANGE BASED ON FUTURE PROJECT REQUIREMENTS.	G	12.02.25	ISSUE FOR 100% SCHEMATIC DESIGN	HI	RL	

COVER SHEET

DUPS-GIL-00-00-DR-L-0001

DUNDAS PUBLIC SCHOOL DUNDAS, NSW 2117 85 KISSING POINT ROAD, DUNDAS NSW 2117

SCALE N/A @A1

PROJECT








FFL 00.00 FINISHED FLOOR LEVEL + EX 00.00 EXISTING SPOT LEVEL + RL 00.00 PROPOSED SPOT LEVEL + TW 00.00 TOP OF WALL LEVEL EXTENT OF WORKS BOUNDARY

– – – – LINE OF BUILDING OVERHEAD

TREE PROTECTION ZONE LINE – – – – LINE OF REMOVED DEMOUNTABLES STORMWATER PIT



PROPOSED GARDEN BED REMEDIATED TURF



OSED TREES	

TO LANDSCAPE ARCHITECT PRIOR TO CONSTRUCTION. FIGURED DIMENSIONS TO BE TAKEN IN PREFERENCE TO SCALED DRAWINGS. ALL WORK IS TO CONFORM TO RELEVANT AUSTRALIAN STANDARDS AND OTHER CODES AS APPLICABLE. LOCATION OF UNDERGROUND SERVICES TO BE PROVEN ON SITE AND PROTECTED IF NECESSARY PRIOR TO CONSTRUCTION. DIAL BEFORE YOU DIG. PLANT SPECIES AND QUANTITIES SHOWN ARE INDICATIVE ONLY AND ARE SUBJECT TO CHANGE BASED ON FUTURE PROJECT REQUIREMENTS.


VERIFY ALL DIMENSIONS ON SITE BEFORE COMMENCING WORK. REPORT ALL DISCREPANCIES

H 11.11.24 ISSUE FOR 100% CONCEPT DESIGN QN RL I 22.11.24 ISSUE FOR COORDINATION QN RL K 25.11.24 ISSUE FOR 80% SCHEMATIC DESIGN QN RL 11.12.24 ISSUE FOR 80% SCHEMATIC DESIGN L QN RL M 18.12.24 ISSUE FOR 100% SCHEMATIC DESIGN QN RL N 17.01.25 ISSUE FOR 100% SCHEMATIC DESIGN QN RL 0 05.02.25 ISSUE FOR 100% SCHEMATIC DESIGN HI RL P 12.02.25 ISSUE FOR 100% SCHEMATIC DESIGN HI RL


LANDSCAPE PLAN


ID	BOTANICAL NAME	EXISTING HEIGHT	PROPOSED ACTION
T12	LAGERSTROEMIA INDICA (CREPE MYRTLE)	8M	RETAINED
T13	LAGERSTROEMIA INDICA (CREPE MYRTLE)	8M	RETAINED
T14	LAGERSTROEMIA INDICA (CREPE MYRTLE)	8M	REMOVE
T22	EUCALYPTUS ROBUSTA (SWAMP MAHOGANY)	17M	RETAINED
T23	EUCALYPTUS MICROCORYS (TALLOWWOOD)	16M	RETAINED
T24	CORYMBIA MACULATA (SPOTTED GUM)	28M	RETAINED
T25	CORYMBIA TORELLIANA (CADAGHI)	15M	RETAINED
T26	EUCALYPTUS ROBUSTA (SWAMP MAHOGANY)	14M	RETAINED
T27	EUCALYPTUS MICROCORYS (TALLOWWOOD)	24M	RETAINED
T28	EUCALYPTUS NICHOLII (SMALL LEAVED PEPPERMINT)	5M	RETAINED
T29	EUCALYPTUS ROBUSTA (SWAMP MAHOGANY)	16M	RETAINED
Т30	EUCALYPTUS MICROCORYS (TALLOWWOOD)	22M	RETAINED

DUPS-GIL-00-00-DR-L	NG NUMBER
PROJECT DUNDAS PUBLIC SCHOOL DUNDAS, NSW 2117 85 KISSING POINT ROAD, DUNDAS NSW 2117	NORTH
SCALE 1:100 @A1 0 1 2 3 4 5M	REV P

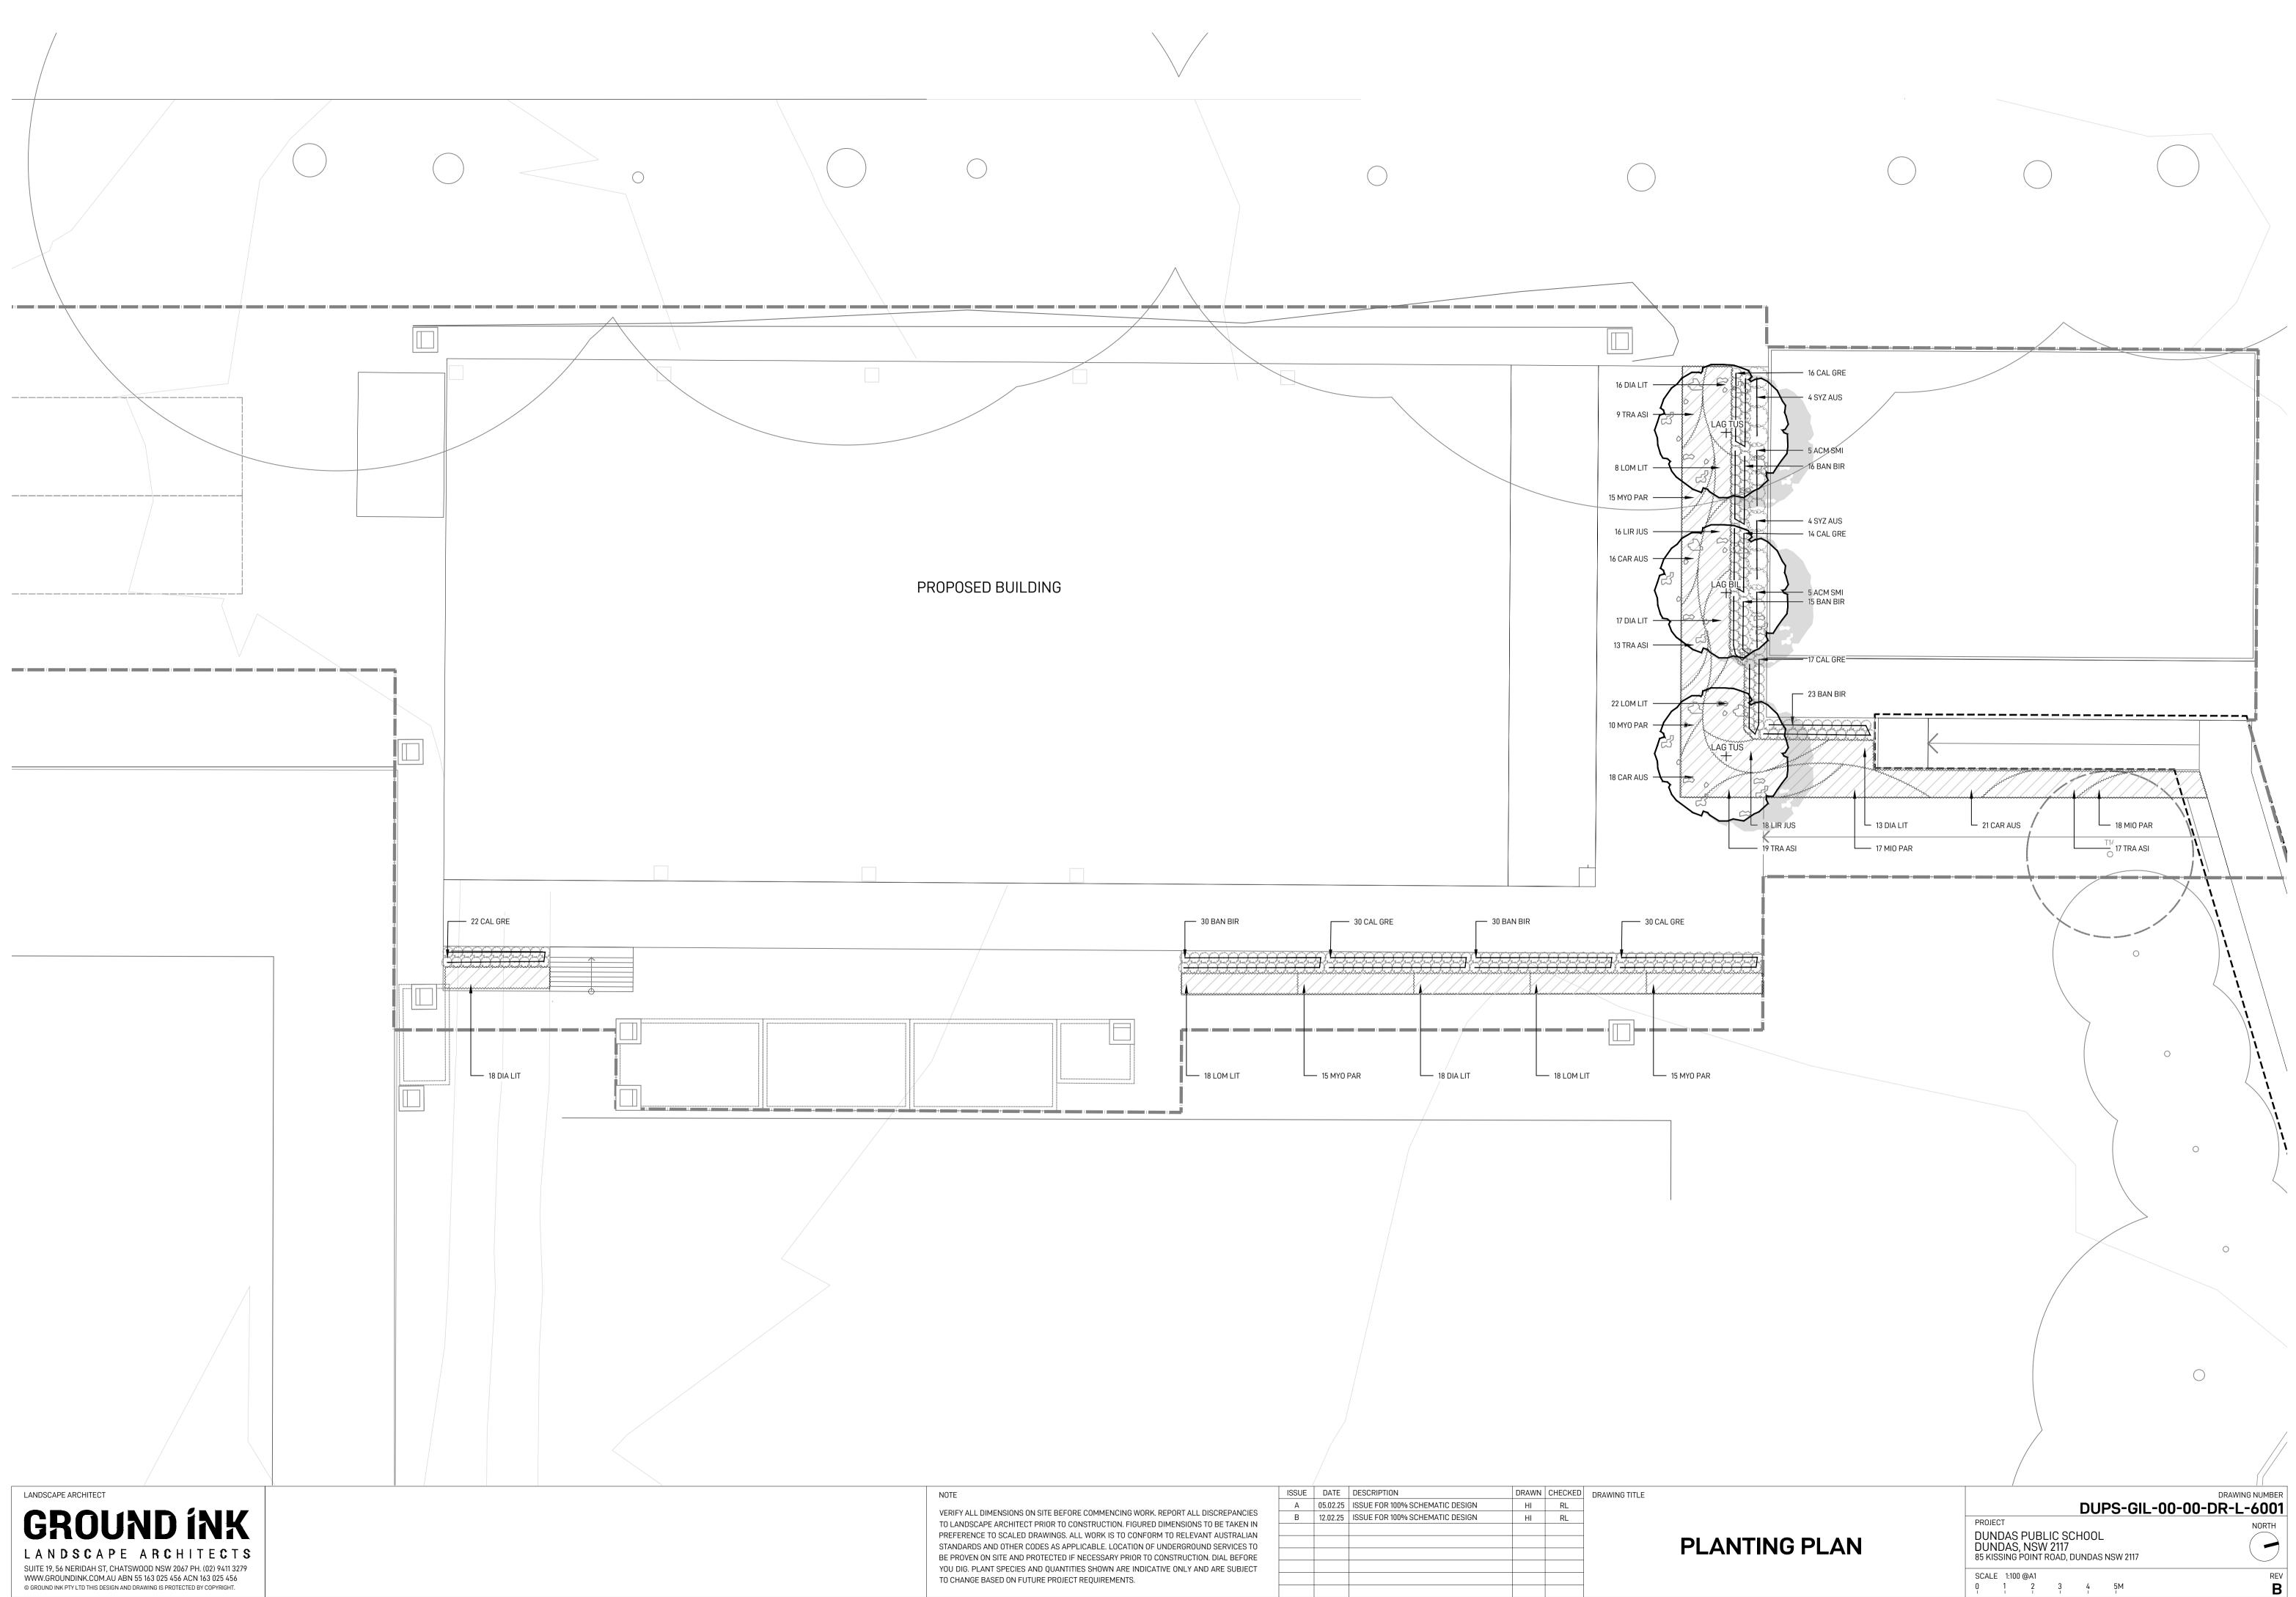

	/		
	ISSUE	DATE	DESCRIPTION
	А	05.02.25	ISSUE FOR 100% SCHEM
ALL DIMENSIONS ON SITE BEFORE COMMENCING WORK. REPORT ALL DISCREPANCIES	В	12.02.25	ISSUE FOR 100% SCHEM
DSCAPE ARCHITECT PRIOR TO CONSTRUCTION. FIGURED DIMENSIONS TO BE TAKEN IN			
ENCE TO SCALED DRAWINGS. ALL WORK IS TO CONFORM TO RELEVANT AUSTRALIAN			
RDS AND OTHER CODES AS APPLICABLE. LOCATION OF UNDERGROUND SERVICES TO /EN ON SITE AND PROTECTED IF NECESSARY PRIOR TO CONSTRUCTION. DIAL BEFORE			
D PLANT SPECIES AND QUANTITIES SHOWN ARE INDICATIVE ONLY AND ARE SUBJECT			
NGE BASED ON FUTURE PROJECT REQUIREMENTS.			
······································			

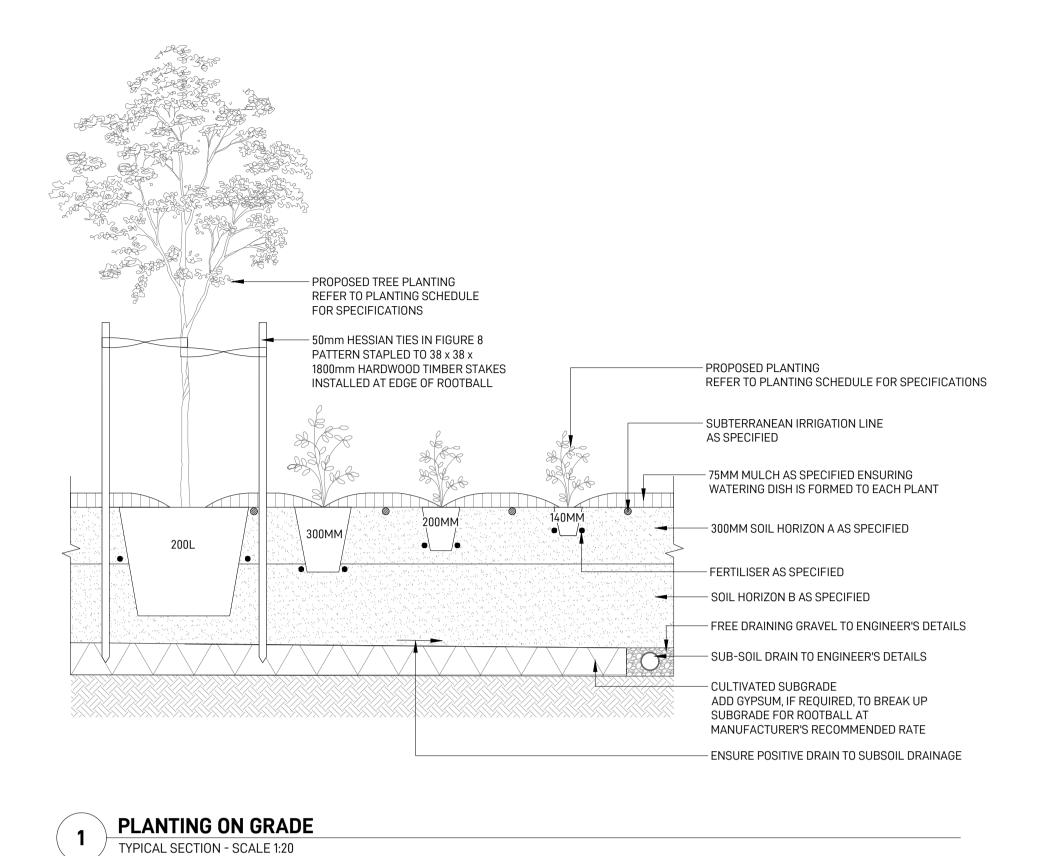

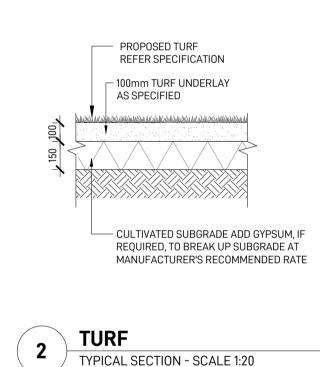



OUTLINE LANDSCAPE SPECIFICATION

GENERAL

MAINTENANCE SHALL MEAN THE CARE AND MAINTENANCE OF THE LANDSCAPE WORKS BY ACCEPTED HORTICULTURAL PRACTICE AS RECTIFYING ANY DEFECTS THAT BECOME APPARENT IN THE LANDSCAPE WORKS UNDER NORMAL USE. THE LANDSCAPE CONTRACTOR SHALL ATTEND THE SITE ON A WEEKLY BASIS TO MAINTAIN THE LANDSCAPE WORKS FOR THE FULL TERM APPROVED AT CC STAGE OF THE MAINTENANCE PERIOD (COMMENCING FROM PRACTICAL COMPLETION).

RUBBISH REMOVAL

DURING THE TERM OF THE MAINTENANCE PERIOD THE LANDSCAPE CONTRACTOR SHALL UNDERTAKE RUBBISH REMOVAL FROM THE SITE ON A WEEKLY BASIS TO ENSURE THE SITE REMAINS IN TIDY CONDITION.

WEED ERADICATION

WEED GROWTH THAT MAY OCCUR IN, PLANTED OR MULCHED AREAS IS TO BE REMOVED USING ENVIRONMENTALLY ACCEPTABLE METHODS I.E. NON-RESIDUAL GLYPHOSATE HERBICIDE, (E.G. 'ROUNDUP', APPLIED IN ACCORDANCE WITH THE MANUFACTURER'S DIRECTIONS) OR HAND WEEDING.

TREE REPLACEMENT

TREES SHALL SHOW SIGNS OF HEALTHY VIGOROUS GROWTH AND BE FREE FROM DISEASE AND NOT EXHIBIT SIGNS OF STRESS PRIOR TO HANDOVER TO THE CLIENT. ANY TREES OR PLANT THAT DIE OR FAIL TO THRIVE, OR ARE DAMAGED OR STOLEN WILL BE REPLACED. REPLACEMENT MATERIAL SHALL HAVE THE MAINTENANCE PERIOD EXTENDED IN ACCORDANCE WITH THE LANDSCAPE CONTRACT CONDITIONS. TREES AND PLANT MATERIALS SHALL BE EQUAL TO THE MINIMUM REQUIREMENTS OF SPECIES SPECIFIED AND APPROVED MATERIAL DELIVERED TO SITE. SHOULD THE CONDITION DECLINE FROM THE APPROVED SAMPLE THE SUPERINTENDENT RESERVES THE RIGHT TO REJECT THE TREE / PLANTS. FREQUENCY: AS REQUIRED.

PRUNING

SELECTIVE PRUNING MAY BE REQUIRED DURING THE ESTABLISHMENT PERIOD TO PROMOTE A BALANCED CANOPY STRUCTURE. THESE ACTIVITIES SHALL BE CARRIED OUT TO THE BEST HORTICULTURAL AND INDUSTRY PRACTICE. ALL PRUNED MATERIAL IS TO BE REMOVED FROM SITE.

IRRIGATION

A LOW VOLUME DRIP IRRIGATION SYSTEM MAY BE INSTALLED AT THE DISCRETION OF THE DEVELOPER. POSITION OF CONTROL BOX, SOLENOIDS AND IRRIGATION CONDUITS TO BE DESIGNED BY QUALIFIED IRRIGATION ENGINEER AT CC STAGE

CONTROLLERS SHALL BE MOUNTED ON A STABLE WALL, POWER RACK, OR FORMED AND CONSTRUCTED CONCRETE BASED PEDESTAL MOUNT. PERFORMANCE SPECIFICATION TO BE PROVIDED BY LANDSCAPE ARCHITECT, NOMINALLY 25MM DELIVERED TO PLANT AREAS EACH WEEK DURING ESTABLISHMENT (DEPENDING ON WEATHER CONDITIONS). AFTER ESTABLISHMENT, IRRIGATION RATES CAN BE DECREASED IN CERTAIN AREAS OF THE LANDSCAPE DEPENDING ON THE SPECIES.

WATERING

IMPLEMENT AN APPROPRIATE HAND WATERING REGIME IN AREAS NOT IRRIGATED IN ASSOCIATION WITH CURRENT WATERING PROGRAMME TO MAINTAIN PLANT HEALTH AND VIGOUR. THE PROGRAM SHALL REFLECT SEASONAL CONDITIONS AND PLANT SPECIES. FREQUENCY: WEEKLY OR AS REQUIRED.

DRAINAGE

ALL LANDSCAPE AREAS ARE TO HAVE POSITIVE DRAINAGE TO SW SYSTEMS. IF AREAS OF POOR DRAINAGE ARE IDENTIFIED ON SITE THEN THIS SHOULD BE BROUGHT TO THE SITE SUPERINTENDENTS ATTENTION. INSTALL AGG LINES IF REQUIRED.

SOILS

HORIZON A - GARDEN BEDS ON NATURAL GROUND A SANDY LOAM TO CLAY LOAM TOPSOIL MIX DESIGNED FOR GENERAL PURPOSE, ON-GRADE LANDSCAPE GARDEN BED PLANTING OF GRASSES, WOODY AND HERBACEOUS ANNUALS AND PERENNIALS THAT HAVE HIGH NUTRIENT REQUIREMENT FOR SUSTAINED OPTIMUM GROWTH, AND ARE NOT SUBJECT TO COMPACTION BY PEDESTRIAN AND OTHER FOOT TRAFFIC. HEAVIER TEXTURED SOILS IN THIS SPECIFICATION MAY REQUIRE ENGINEERED SOLUTIONS WHERE EXCESSIVE WETNESS IS ANTICIPATED. NOTE THAT ORGANIC SOIL VARIANT SHOULD NOT BE CHOSEN FOR LOW P PLANTINGS AND SHOULD NOT BE USED

MAINTENANCE SCHEDULE

	JAN	FEB	MAR	APR	MAY	JUN	JUL	AUG	SEP	OCT	NOV	DEC
INSPECTIONS	2M		2M		2M		2M		2M		2M	
WATERING	W	W	W	W	W	W	W	W	W	W	W	W
WEED AND PEST MANAGEMENT	AR	AR	AR	AR	AR	AR	AR	AR	AR	AR	AR	AR
LITTER REMOVAL	2M		2M		2M		2M		2M		2M	
REMOVAL OF DEAD/DYING TREE LIMBS	2M		2M		2M		2M		2M		2M	
PLANT REPLACEMENT IF REQUIRED	AR	AR	AR	AR	AR	AR	AR	AR	AR	AR	AR	AR
MULCHING	AR	AR	AR	AR	AR	AR	AR	AR	AR	AR	AR	AR
TREE STAKE ADJUSTMENTS	AR	AR	AR	AR	AR	AR	AR	AR	AR	AR	AR	AR
FERTILISING	AR	AR	AR	AR	AR	AR	AR	AR	AR	AR	AR	AR
PLANTING ESTABLISHMENT PERIOD - 12 N	IONTHS							·				
LANDSCAPE MATERIAL ESTABLISHMENT	- 12 MONTHS	6										
KEY W-WEEKLY, 2M- EVERY TWO MONTHS	S, AR- AS REC)UIRED										
THE CONTRACTOR IS TO ALLOW 52 WEEKS PLANTING ESTABLISHMENT PERIOD FROM THE DATE OF PRACTICAL COMPLETION. CONTRACTOR TO MAINTAIN A LOG BOOK TO KEEP A RECORD OF MAINTENANCE EVERY MONTH. REPLACEMENTS OF FAILED, DAMAGED OR STOLEN PLANTS TO BE CARRIED OUT DURING THE MAINTENANCE PERIOD. IRRIGATION SYSTEMS TO BE INSTALLED AND MAINTAINED DURING THE MAINTENANCE PERIOD. LANDSCAPE MAINTENANCE REPORT SHALL BE SUBMITTED TO THE PRINCIPLE CERTIFYING AUTHORITY BY THE CONTRACTOR.												

BELOW 300MM. PLANTING METHODS INCLUDE DIRECT SEEDING, TUBE AND POTTED SPECIMENS UP TO 45L

HORIZON B – LARGER POTTED PLANTING BELOW 300MM A SANDY, WELL DRAINED MEDIUM WITH LOW ORGANIC MATTER FOR BACKFILLING BELOW 300MM FROM THE SURFACE IN LARGER POTTED SPECIMENS OVER 45L OR 400MM DEPTH OF ROOT BALL, SEMI-ADVANCED, ADVANCED AND SUPER ADVANCED TREE PLANTING. THE SPECIFICATION MAY USE A SMALL PROPORTION OF SITE WON TOPSOIL OR SUBSOIL, PROVIDED THE ORGANIC MATTER UPPER LIMIT IS NOT EXCEEDED.

CULTIVATION

ALL GARDEN BEDS TO BE CULTIVATED TO A MIN DEPTH OF 150MM AND TREE PITS TO THE DEPTH OF THE ROOT BALL ONLY. IF ADDITIVES SUCH AS GYPSUM ARE REQUIRED CONDUCT THIS AFTER CULTIVATION INTO THE TOP 100MM OF SOIL.

PLANTING

ALL PLANTING TO BE GROWN TO NATSPEC SPECIFICATIONS. CONTRACTOR TO PREPARE SITE FOR PLANTING INCLUDING WATERING, HANDLING, SETTING OUT AND EXCAVATION. EXCAVATE A HOLE FOR EACH PLANT LARGE ENOUGH TO PROVIDE NOT LESS THAN 100MM ALL AROUND THE ROOT SYSTEM OF THE PLANT. FOR TREE PLANTING EACH HOLE SHALL BE DUG WITH A SHOVEL, BACKHOE OR SIMILAR TOOL. INDIVIDUAL HOLES SHALL BE EXCAVATED TO ALLOW ROOT SYSTEM TO SIT FLAT ON THE EXCAVATED HOLE AND 400MM TO EACH SIDE OF THE ROOT SYSTEM. BACKFILL PLANTING HOLES WITH EXISTING SITE SOIL AND TOPSOIL AS DESCRIBED IN SECTION 'SOIL', PLANT / TREE SHALL BE SET PLUMB, WITH THE ROOT BALL SET SLIGHTLY BELOW THE FINAL SOIL LEVEL.

MULCHING

THE LANDSCAPE CONTRACTOR SHALL SUPPLY AND INSTALL 10MM PINE BARK MULCH TO ALL GARDEN BEDS SHOWN ON THE LANDSCAPE PLANS, TO A MINIMUM DEPTH OF 75MM. ALL MULCH IS TO BE FREE OF DELETERIOUS MATTER SUCH AS SOIL, WEEDS AND STICKS. MULCHED SURFACES ARE TO BE KEPT CLEAN AND TIDY AND FREE OF ANY DELETERIOUS MATERIAL AND FOREIGN MATTER. REINSTATE DEPTHS TO A UNIFORM LEVEL OF 75MM WITH MULCH AS SPECIFIED, MULCH TO BE FREE OF ANY WOOD MATERIAL IMPREGNATED WITH CCA OR SIMILAR TOXIC TREATMENT. MAINTAIN WATERING RINGS AROUND TREES. TOP UP MULCH LEVELS PRIOR TO HANDOVER TO CLIENT.

TURFING

THE LANDSCAPE CONTRACTOR SHALL SUPPLY AND INSTALL SAPPHIRE BUFFALO TURF IN STRETCHER PATTERN TO ALL TURF AREAS SHOWN ON THE LANDSCAPE PLANS AND IS TO FINISH FLUSH WITH ADJACENT SURFACES. TURF TO BE A MIN THICKNESS OF 50MM WITH A 40MM MOWING HEIGHT. CONTRACTOR TO ALLOW FOR FERTILISING, LAYING, TAMPING, WATERING, TOP DRESSING, MAINTENANCE AND MOWING. THE LANDSCAPE CONTRACTOR SHALL SUPPLY AND INSTALL TURF UNDERLAY UNDER ALL TURF AREAS, CONSISTING OF 100MM THICK LAYER OF SCREENED TOP SOIL.

PEST AND DISEASE CONTROL

THE LANDSCAPE CONTRACTOR SHALL SPRAY FOR PESTS AND DISEASE INFESTATIONS WHEN THE PEST AND FUNGAL ATTACK HAS BEEN POSITIVELY IDENTIFIED AND WHEN THEIR POPULATIONS HAVE INCREASED TO A POINT THAT WILL BECOME DETRIMENTAL TO PLANT GROWTH. APPLY ALL PESTICIDES TO MANUFACTURER'S DIRECTIONS. FREQUENCY: WEEKLY INSPECTION

FERTILISING

PELLETS SHALL BE IN THE FORM INTENDED TO UNIFORMLY RELEASE PLANT FOOD ELEMENTS FOR A PERIOD OF APPROXIMATELY NINE MONTHS EQUAL TO SHIRLEYS KOKEI PELLETS, ANALYSIS 6.3:1.8:2.9 OR SIMILAR APPROVED. KOKEI PELLETS SHALL BE PLACED AT THE TIME OF PLANTING TO THE BASE OF THE PLANT, 50MM MINIMUM FROM THE ROOT BALL AT A RATE OF TWO PELLETS PER 300MM OF TOP GROWTH TO A MAXIMUM OF 8 PELLETS PER TREE. GENERALLY CHECK FOR SIGNS OF NUTRIENT DEFICIENCIES (YELLOWING OF LEAVES, FAILURE TO THRIVE), AND ADAPT FERTILISER REGIME TO SUIT. FERTILISER SHOULD BE APPLIED AT THE BEGINNING AND THE END OF THE (SUMMER) GROWING SEASON.

DSCAPE DETAILS

DRAWING NUMBER DUPS-GIL-00-00-DR-L-9001

DUNDAS PUBLIC SCHOOL DUNDAS, NSW 2117 85 KISSING POINT ROAD, DUNDAS NSW 2117

PROJECT

SCALE 1:20@A1 0 0.1 0.2 0.3 0.4 0.5m