

Construction Environmental Management Plan

Kingscliff Public School Redevelopment
SSD-8378620

September 2023

REV 5

RICHARD CROOKES

CONSTRUCTIONS

Document Control

Version no.	Description	Prepared by	Reviewed by	Date
DRAFT	DRAFT	ENV Solutions P/L	Ben Pieterse	08/10/2021
Rev 1	Deliverable	ENV Solutions P/L	Jenny Hellyer & B.P.	7/4/2022
Rev 2	Deliverable	ENV Solutions P/L	Jenny Hellyer & B.p.	29/03/2022
Rev 3	Review	Richard Crookes	Jason Cooke	16/09/2022
Rev 4	Review	Richard Crookes	Jason Cooke	13/07/2023
Rev 5	Review	Richard Crookes	Pat Wills	27/09/2023

SSD-8378620 Compliance Table

Kingscliff Public School - CEMP Condition Satisfaction		
Condition	Details	Section & Page No.
B15	Prior to the commencement of construction, the Applicant must submit a Construction Environmental Management Plan (CEMP) to the Certifier and provide a copy to the Planning Secretary for information. The CEMP must include, but not be limited to, the following:	
	(a) Details of:	
	(i) hours of work;	CEMP Section 1.2 page 9
	(ii) 24-hour contact details of site manager;	CEMP Section 1.3 page 10
	(iii) management of dust and odour to protect the amenity of the neighbourhood;	CEMP Section 2 page 33-34
	(iv) external lighting in compliance with AS 4282-2019 Control of the obtrusive effects of outdoor lighting;	CEMP Section 3 page 35
	(v) community consultation and complaints handling as set out in the Community Communication Strategy required by condition B9;	CEMP Section 4 Page 36 - 37
	(b) an unexpected finds protocol for contamination and associated communications procedure to ensure that potentially contaminated material is appropriately managed;	CEMP Section 6 page 38 - 41
	(c) an unexpected finds protocol for Aboriginal and non-Aboriginal heritage and associated communications procedure;	CEMP Section 6 page 38 - 41
	(d) Construction Traffic and Pedestrian Management Sub-Plan (see condition B15);	CEMP Section 7 page 42-43 Refer to CTPMSP
	(e) Construction Noise and Vibration Management Sub-Plan (see condition B16);	CEMP Section 8 page 44 Refer to CNVMSP
	(f) Construction Waste Management Sub-Plan (see condition B17);	CEMP Section 9 page 46 Refer to CWMSP
(g) Construction Soil and Water Management Sub-Plan (see condition B18);	CEMP Section 10 page 48 Refer to CSWMSP	
(h) Biodiversity Management Sub-Plan (see condition B19);	CEMP Section 11 page 50 Refer to BMSP	
B16	The Construction Traffic and Pedestrian Management Sub-Plan (CTPMSP) must be prepared to achieve the objective of ensuring safety and efficiency of the road network and address, but not be limited to, the following:	
	(a) be prepared by a suitably qualified and experienced person(s)	CTPMSP Cover Page: Registration Number of the suitably qualified and experienced person who prepared the report Appendix K: Certificates and competencies

Condition	Details	Section & Page No.
	(b) be prepared in consultation with Council and TfNSW	CTPMSP Refer to zip file & consultation record attached.
	(c) detail the measures that are to be implemented to ensure road safety and network efficiency during construction in consideration of potential impacts on general traffic, cyclists and pedestrians and bus services;	CTPMSP Page 13-14, Section 8 Page 21, Section 12.25
	(d) address potential cumulative construction impacts of nearby construction projects, including Tweed Valley Hospital Development and Kingscliff High School Redevelopment, and include provisions to ensure that work activities are coordinated to minimize impacts on the surrounding road network; and	CTPMSP Page 19 section 12.15
	(e) detail heavy vehicle routes, access and parking arrangements;	CTPMSP Page 20 section 12.18
B17	The Construction Noise and Vibration Management Sub-Plan must address, but not be limited to, the following:	
	(a) be prepared by a suitably qualified and experienced noise expert;	CNVMSPP Appendix A Page 32
	(b) address the recommendations of the Noise and Vibration Impact Assessment dated 6 May 2021 and prepared by Acoustic Works;	CNVMSPP Section 7 Page 17 -27
	(c) describe procedures for achieving the noise management levels in EPA's Interim Construction Noise Guideline (DECC, 2009);	Section 7 Page 17 -27
	(d) describe the measures to be implemented to manage high noise generating works such as piling, in close proximity to sensitive receivers;	CNVMSPP Section 7 Page 17 -27
	(e) include strategies that have been developed with the community for managing high noise generating works;	CVMSP Section 7 Page 17 -27
	(f) describe the community consultation undertaken to develop the	NA
	(g) include a complaints management system that would be implemented for the duration of construction	CNVMSPP Section 7 Page 27
	(h) include a program to monitor and report on the impacts and environmental performance of the development and the effectiveness of the implements management measures in accordance with the requirements of condition B14	CNVMSPP Section 7 Page 18 -28
B18	The Construction Waste Management Sub-Plan (CWMSP) must address, but not be limited to, the procedures for the management of waste including the following:	
	(a) the recording of quantities, classification (for materials to be removed) and validation (for materials to remain) of each type of waste generated during construction and proposed use;	CWMSP Section 5 Pages 3- 6
	(b) information regarding the recycling and disposal locations; and	CWMSP Section 5.5 Table 5-2 Page 8 -9
	(c) confirmation of the contamination status of the development areas of the site based on the validation results.	N/A

Kingscliff Public School - CEMP Condition Satisfaction		
Condition	Details	Section & Page No.
B19	The Applicant must prepare a Construction Soil and Water Management Sub-Plan (CSWMSP) and the plan must address, but not be limited to the following:	
	(a) be prepared by a suitably qualified expert, in consultation with Council;	CSWMSP Appendix C page 26
	(b) measures to ensure that sediment and other materials are not tracked onto the roadway by vehicles leaving the site;	CSWMSP Page 17 Appendix A - Page 23
	(c) describe all erosion and sediment controls to be implemented during construction, including as a minimum, measures in accordance with the publication Managing Urban Stormwater: Soils & Construction (4th edition, Landcom 2004) commonly referred to as the 'Blue Book';	CSWMSP Section 6 Page 14
	(d) include an Acid Sulfate Soils Management Plan, including measures for measures for the management, handling, treatment and disposal of acid sulfate soils, including monitoring of water quality at acid sulfate soils treatment areas as set out Section 13 of the Detailed Investigation of Contamination Far North Coast Schools project Kingscliff Public School, 12 orient Street Kingscliff NSW 2487, dated August 2021 and prepared by Douglas Partners;	CSWMSP Appendix C page 27
	(e) provide a plan of how all construction works will be managed in a wet-weather events (i.e. storage of equipment, stabilisation of the Site);	CSWMSP Appendix A
	(f) detail all off-site flows from the site; and	CSWMSP Section 4 Pages 11, Section 6.2 Page 16, Section 6.3 Page 17 & Table 3 Page 19
	(g) describe the measures that must be implemented to manage stormwater and flood flows for small and large sized events, including, but not limited to 1 in 5-year ARI.	CSWMSP Section 6.3 Pages 15 & Table 3 Page 18-20 Appendix A page 23
B20	The Biodiversity Management Sub-Plan (BMSP) must address, but not be limited to, the following:	
	(a) be prepared by a suitably qualified and experienced person/s;	BMSP Appendix 1
	(b) identify areas of land where impacts on biodiversity are to be avoided as outlined in the Biodiversity Development Assessment Report prepared by Kleinfelder, dated 6 May 2021 and set out how these areas will be protected from construction impacts;	BMSP Section 3 Page 8
(c) set out the measures identified in the Biodiversity Development Assessment Report to minimise, mitigate and manage impacts on biodiversity, including timing and responsibility for delivery of the measures.	BMSP Section 3 Page 6 - 9	

Kingscliff Public School - CEMP Condition Satisfaction		
Condition	Details	Section & Page No.
B21	A Driver Code of Conduct must be prepared and communicated by the Applicant to heavy vehicle drivers and must address the following: (a) minimise the impacts of earthworks and construction on the local and regional road network; (b) minimise conflicts with other road users; (c) minimise road traffic noise; and (d) ensure truck drivers use specified routes.	CTPMSP Page 43, Appendix J
B23	Prior to the commencement of construction, the Applicant must submit a Construction Worker Transportation Strategy to the Certifier. The Strategy must detail the provision of sufficient parking facilities or other travel arrangements for construction workers in order to minimise demand for parking in nearby public and residential streets or public parking facilities. The Strategy must include arrangements to prohibit workers using the informal path through the adjacent Council land to Cudgen Foreshore Park. A copy of the strategy must be provided to the Planning Secretary for information.	CEMP Section 7.2 , Page 45
B24	Prior to the commencement of construction, the Applicant must prepare an Aboriginal Heritage Management Plan for the development to the satisfaction of the Planning Secretary. This plan must: (a) be prepared by suitably qualified and experienced persons; (b) be prepared in consultation with Registered Aboriginal Parties; (c) include a methodology for an archaeological excavation program of the site with consideration to understanding site characteristics and local and regional prehistory; (d) include a description of the measures that would be implemented for: (i) protecting the Aboriginal heritage items identified within the project footprint or items located outside the approved development footprint, including fencing off the Aboriginal heritage items prior to commencing construction; (ii) salvaging and relocating the Aboriginal heritage items located within the approved development footprint; (iii) salvaging, relocating or avoiding any Aboriginal heritage items located within the approved development footprint identified during test excavations of the site; (iv) include updated baseline mapping of the heritage items within and adjoining to the development disturbance area; (v) include updated mapping of all areas that have been and will be subject to monitoring, test excavations, and salvage excavations; (vi) include conservation options for the mitigation and avoidance to impacts on Aboriginal Heritage Information Management Systems registered sites situated within and outside the project footprint; (vii) prepare a methodology outlining when Registered Aboriginal Parties must be notified of changes to the Aboriginal Heritage Management Plan; (viii) include a procedure for assessing significance of Aboriginal Objects identified during the monitoring, test excavations, and salvage excavation and ensure that the management and mitigation measures are considered for all sites, and with special consideration for those of high significance; and (ix) a strategy for the long term management of any Aboriginal heritage items or material collected during the test excavation or salvage works	CEMP Section 6.3, Page 44

Contents

SSD-8378620 Compliance Table	3
Glossary/Abbreviations	9
1 Introduction	11
1.1 Project Overview	11
1.2 Hours of Work	12
1.3 24-hour Contact Details of Construction Manager	12
1.4 Objectives of the Construction Environmental Management Plan	12
1.5 Relationship to other Reports	13
1.6 Roles and Responsibilities	14
1.7 Implementation	16
1.8 Relevant Legislation	27
1.9 Communication	29
1.10 Emergency and Incident Planning	31
1.11 Monitoring, Inspections and Auditing	31
1.12 Environmental Nonconformities	33
1.13 Records of Environmental Activities	34
1.14 Management Review	34
1.15 CEMP/Sub Plan Revision	34
2 Management of Dust and Odour	36
2.1 Consent Requirements	36
2.2 Relevant Conditions to Consider	36
2.3 Air Quality	36
3 External Lighting	38
3.1 Consent Requirements	38
4 Community Consultation and Complaints Handling	39
4.1 Consent Requirements	39
4.2 Relevant Conditions	39
4.3 Communications Strategy	39
4.4 Complaints Handling	40
5 Unexpected Finds Protocol for Contamination	41
5.1 Consent Requirement	41
5.2 Summary of Protocol	41
6 Unexpected Finds Protocol for Aboriginal and Non-Aboriginal Heritage	43
6.1 Consent Requirement	43
6.2 Summary of Protocol	43
6.3 Aboriginal Cultural Heritage Management Plan	44
7 Construction Traffic and Pedestrian Management Sub Plan	47
7.1 Consent Requirements	47
7.2 Relevant Conditions to Consider	47
8 Construction Noise and Vibration Sub-Plan	49
8.1 Consent Requirement	49
8.2 Relevant Conditions to Consider	49
9 Construction Waste Management Sub Plan	51
9.1 Consent Requirement	51
9.2 Relevant Conditions to Consider	51
10 Construction Soil and Water Management Sub Plan	53
10.1 Consent Requirements	53
10.2 Relevant Conditions to Consider	53
11 Construction Biodiversity Management Sub Plan	55

11.1 Consent Requirements	55
11.2 Relevant Conditions to Consider	55
12 Tree Protection	57
12.1 Consent Requirements	57
13 References	58

Tables

Table 1-1 Conditions of Consent for Construction Activities	17
Table 1-2 Relevant Legislation	28
Table 1-3 Auditing Requirements	32

Appendixes

- Appendix A – Construction Soil and Water Management Sub Plan
- Appendix B – Construction Waste Management Sub Plan
- Appendix C – Construction Noise and Vibration Management Sub Plan
- Appendix D – Construction Traffic and Pedestrian Management Sub Plan
- Appendix E – Construction Biodiversity Management Sub Plan
- Appendix F – Aboriginal Heritage – Heritage NSW Response
- Appendix G – Aboriginal Heritage Impact Permit – AHIP number: 4857

Glossary/Abbreviations

Term / Abbreviation	Definition / Expanded text
ACHMP	Aboriginal Cultural Heritage Management Plan
ASS	Acid Sulfate Soils
CEMP	Construction Environmental Management Plan
CEMS	Contractors Environmental Management System
Compliance audit	Verification of how implementation is proceeding with respect to a Construction Environmental Management Plan (CEMP) (which incorporates the relevant approval conditions).
DPE	Department of Planning and Environment
EEC	Endangered Ecological Community
Ecologically sustainable development	Using, conserving and enhancing the community's resources so that the ecological processes on which life depends are maintained and the total quality of life now and in the future, can be increased (Council of Australian Governments, 1992)
EMR	Environmental Management Representative (SINSW)
EMS	Environmental Management System
Environmental Aspect	Defined by AS/NZS ISO 14001:2015 as an element of an organisation's activities, products or services that can interact with the environment.
Environmental Impact	Defined by AS/NZS ISO 14001:2015 as any change to the environment, whether adverse or beneficial, wholly or partially resulting from an organisation's environmental aspects.
Environmental Incident	An unexpected event that has, or has the potential to, cause harm to the environment and requires some action to minimise the impact or restore the environment.
EMM	Environmental Management Measure
Environmental Objective	Defined by AS/NZS ISO 14001:2015 as an overall environmental goal, consistent with the environmental policy, that an organisation sets itself to achieve.
Environmental Policy	Statement by an organisation of its intention and principles for environmental performance.
Environmental Target	Defined by AS/NZS ISO 14001:2015 as a detailed performance requirement, applicable to the organisation or parts thereof, that arises from the environmental objectives and that needs to be set and met in order to achieve those objectives.
EP&A Act	<i>Environmental Planning and Assessment Act 1979</i> (NSW)
EPA	NSW Environment Protection Authority
WHS&E	Environmental Site Representative (RCC)

EWMS	Environmental work method statement
Hold point	Is a verification point that prevents work from commencing prior to approval from Department of Education NSW (DoE) or Department of Planning, Industry and Environment (DPIE)
Incident	An occurrence or set of circumstances that causes or threatens to cause material harm and which may or may not be or cause a non-compliance. Note 'material harm' is defined in the consent
Material Harm	A) Involves actual or potential harm to the health and safety of human beings or to the environment that is not trivial; or B) Results in actual or potential loss or property damage of an amount, or amounts in aggregate, exceeding \$10,000(such loss includes the reasonable costs and expenses that would be incurred in taking all reasonable and practicable measures to prevent mitigate or make good hard to the environment.
Minister, the	Minister of the NSW Department of Planning, Industry and Environment (or delegate)
Non-compliance	Failure to comply with the requirements of the Project approval or any applicable licence, permit or legal requirements.
Non-conformance	Failure to conform to the requirements of Project system documentation including this CEMP or supporting documentation.
OEH	Office of Environment and Heritage
PESCP	Progressive Erosion and Sediment Control Plan
Principal, the	Department of Education NSW (DoE)
POEO Act	<i>Protection of the Environment Operations Act 1997 (NSW)</i>
Project, the	Kingscliff Primary School
	School Infrastructure NSW

1 Introduction

This Construction Environmental Management Plan (“CEMP”) has been prepared by ENV Solutions on behalf of the Richard Crookes Construction for the construction / upgrade of the Kingscliff Public School (KPS)(SSD-8378620). The Construction Environmental Management Plan has been prepared in accordance with the conditions of the State Significant Development Approval SSD-8378620.

This has been prepared to meet the requirements of condition B15 of the developments Conditions of Consent, to be approved by the certifying authority and will be submitted to the Department of Planning Industry and Environment (DPIE) for information.

1.1 Project Overview

As part of the NSW Governments \$7 billion School Infrastructure Package, the KPS upgrade will include the construction of 32 permanent innovative learning spaces with upgrades to the core facilities to cater for future enrolment growth in the area. A new library will also be constructed and will feature a variety of study, teaching and learning spaces that have the potential to open onto an outdoor terrace and garden. The design (Figure 1-1) of the new areas will incorporate future focused learning strategies that support the needs of the community and provide a learning-centred approach to education.

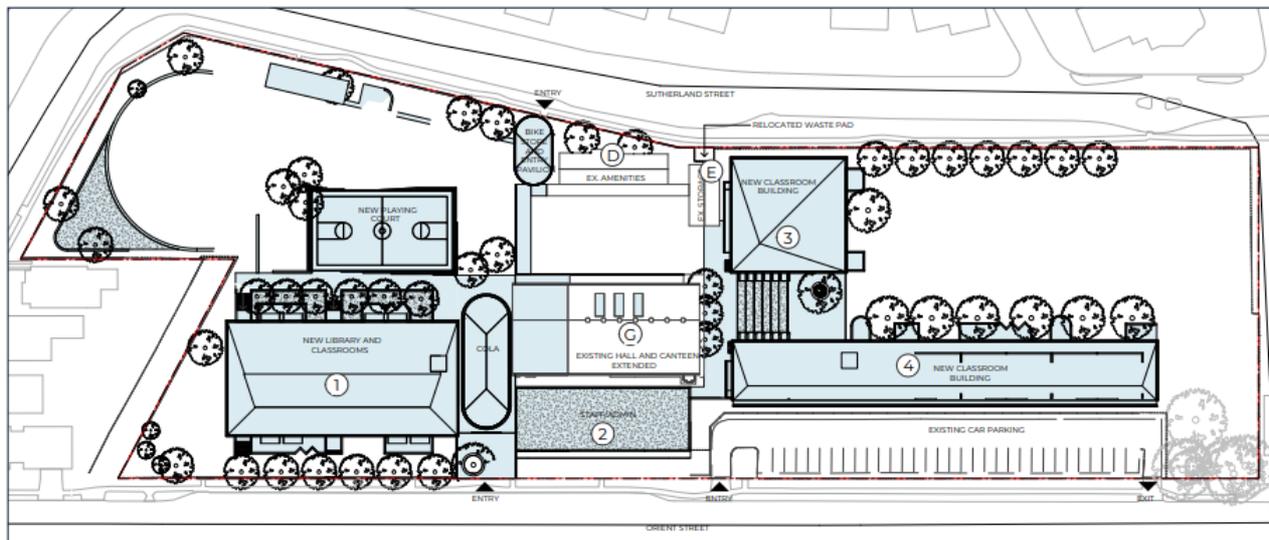


Figure 1-1 Proposed Design

To accommodate the proposed upgrade to the school, the following construction methodology shall be adopted:

- Demolition (removal) of 11 demountable buildings, as well as the library and administration building, multiple classrooms, maintenance store and program room.
- Construction of the following new buildings and structures:
 - New main entry off Orient Street and covered outdoor learning area (COLA);
 - New secondary entry and bike store off Sutherland Street to the west;
 - New two (2) storey building to the north, with ground floor library, 12 homebases, one (1) special programs room;
 - Two (2) x new two (2) storey buildings to the south, with 20 homebases and two (2) special programs rooms; and
 - New play court.
- Tree removal, tree replacement and landscape embellishment to school playgrounds and site;
- Offsite works to the public domain and on Sutherland and Orient Streets, including:

- Additional pedestrian crossing;
- Relocation of bus zones and kiss n drop areas; and
- New pedestrian pathways.

1.1.1 Indicative Date of Commencement of Construction

The indicative date of commencement of construction to early 2022.

1.1.2 Submission to Planning Secretary for Information.

In accordance with Condition B15, this CEMP must be submitted to the Certifying Authority for approval and submitted to the Planning Secretary for information.

1.2 Hours of Work

The proposed hours of work for the project are as follows:

Monday – Friday: 7 am – 6 pm

Saturday: 8 am – 1 pm

Sunday: No work on Sundays or Public Holidays

The proposed hours align to Condition C4 of SSD-8378620

1.3 24-hour Contact Details of Construction Manager

Name of Site Manager: Brad Cox

Phone number: 0416 050 471

Email: coxb@richardcrookes.com.au

1.4 Objectives of the Construction Environmental Management Plan

This Construction Environmental Management Plan (CEMP) and the associated sub plans have been prepared to outline and describe how RCC will, during the construction of the KPS upgrade comply with the relevant conditions specified within the EIS documentation, Development Conditions of Consent (February 2022) and all associated licences, permits and approvals.

It outlines how RCC will minimise the environmental risks and achieve environmental outcomes on the project by providing a structured approach to ensure appropriate mitigation measures and controls are implemented.

The CEMP has been prepared in accordance with:

- The Environmental Impact Statement (EIS) documentation
- Developmental Conditions of Consent
- Guideline for the Preparation of Environmental Management Plans (DIPNR)
- AS/NZS ISO 14001.

This CEMP will:

- Ensure appropriate controls and procedures are implemented during Construction to avoid or minimise real and potential impacts to the environment and sensitive receivers.
- Ensure appropriate measures are implemented to comply with all relevant legislation and other requirements.
- Provide site workers with an increased level of understanding and awareness of sensitive environmental issues associated with the Project and ensure effective communication is maintained with all regulatory agencies.


- Fulfil compliance requirements and contractual obligations under the Project’s approved EIS documentation, the Developmental Conditions of Consent, and other relevant approval documents.
- Align with the Project EMS.
- Ensure the needs and expectations of the Department of Education are addressed.
- Manage environmental and sustainability risks and opportunities through development of the CEMP and associated Management plans.
- Communicate that active and visible leadership and commitment are integral in achieving compliance with the daily mitigation of environmental impact.
- Demonstrate the processes and the Project’s commitment to the principles of Ecologically Sustainable Development.
- Internalise and apply risk management methodologies, including the pre-cautionary principle to the Project.
- Apply intuitive environmental management tools and incentivised mechanisms to assist in decision-making in the protection of the environment.
- Internalise hold-points to assist in decision-making.
- To assure biodiversity, ecological and heritage values are conserved.
- Assist and set the framework for establishing workshops and other forums at all levels to facilitate learning, innovation and knowledge-sharing.
- Integrate environmental management practices and processes across other disciplines such as safety, quality and engineering.

The requirements of this approval and where they are met in this CEMP are shown in Table 1-1 (Section 1.7).

This CEMP is the overarching document in the environmental management system for the Kingscliff Public School Upgrade that includes a number of management documents. It is applicable to all staff and sub-contractors associated with the construction of the Project.

1.5 Relationship to other Reports

This CEMP is the overarching document in the environmental management system for the Kingscliff Public School Upgrade that includes a number of management documents. It is applicable to all staff and sub-contractors associated with the construction of the Project.

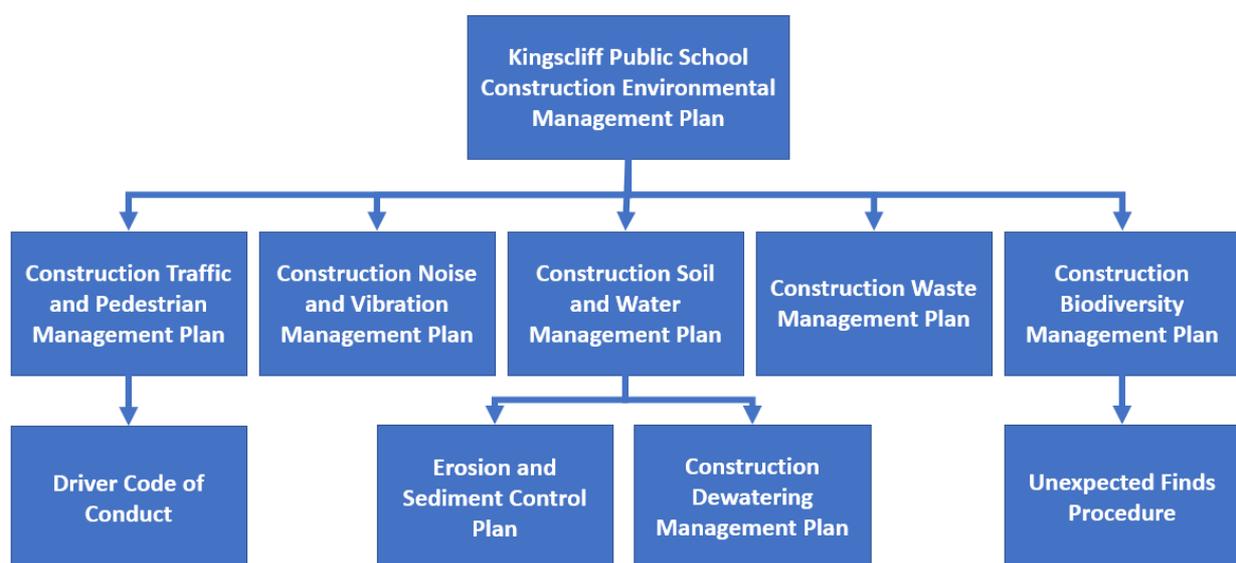

1.6 Roles and Responsibilities

This CEMP has been prepared for Richard Crookes Construction (RCC), engaged as the Principal Contractor (PC) by School Infrastructure NSW (Client Representative) on behalf of Department of Education (Client), to upgrade the site. As the PC, RCC hold primary accountability in upholding the agreed minimum environmental standard, as required by the Conditions of Consent specified within the State Significant Development Approval SSD-8378620.

Individual roles and responsibilities are listed below.

1.6.1 Project Manager

- Inform and instruct RCC personnel in the application of the Environmental Management System;
- Ensure all aspects of the Environmental Management System are in place as required and any issues are resolved in a timely manner;
- Be available for all personnel to confirm procedures or ask questions on any aspect of the Environmental Management System;
- Provide advice on compliance with standards, codes of practice, etc.;
- Oversee site process control;
- Reporting, as required, both internal (RCC) and to SINSW (Client Representative);
- Review all incident/non-conformance records, accident & incident reports and audit reports;
- Authorise subcontract tendering and subcontract procedures, and establish an administrative system to monitor the subcontracts and the payment of subcontractors in relation to their environmental responsibilities;
- Cooperate, consult and coordinate activities with the principal to ensure that all contractors engaged to perform any part of this work assists in ensuring the principal complies with all relevant environmental legislation and site-specific rules;
- Ensure all works comply with relevant regulatory and Project requirements;
- Ensure the requirements of this CEMP are fully implemented, and in particular, that environmental requirements are not secondary to other construction requirements;
- Endorse and support the Project environmental policy;
- Liaise with SINSW, DoE and Government Authorities as required;
- Participate and provide guidance in the regular review of this CEMP and supporting documentation;
- Provide adequate resources (personnel, financial and technological) to ensure effective development, implementation and maintenance of this CEMP;
- Ensure that all personnel receive appropriate induction training, including details of the environmental and community requirements;
- Ensure that complaints are investigated to ensure effective resolution, and;
- Stop work immediately if an unacceptable impact on the environment is likely to occur.

1.6.2 Site Construction Manager

- Implement and ensure adherence to this and other project plans;
- Implement all environmental plans and procedures as required;
- Co-ordination of all on site activities including subcontract interface;
- Organization of all deliveries and managing materials handling;
- Establish and maintain site environmental measures;
- Implementation of all inspection and testing requirements;
- Liaison and co-ordination with testing and inspection authorities;
- Preparation of check sheets and supervision of remedial works;
- Liaise with Project Manager to co-ordinate the works and resources required;

- Provide the Principal access to the site and all necessary assistance to allow system audits, site audit, checks or obligations;
- Communicate with all personnel and sub-contractors regarding compliance with the CEMP and site-specific environmental issues;
- Ensure all site workers attend an environmental induction prior to the commencement of works;
- Co-ordinate the implementation of the CEMP;
- Co-ordinate the implementation and maintenance of pollution control measures;
- Identify resources required for implementation of the CEMP;
- Support the WHS&E (RCC) and/or EMR (SINSW) in achieving the project environmental objectives, including on ground implementation of the ESCP;
- Report any activity that has resulted, or has the potential to result, in an environmental incident immediately to the construction WHS&E (RCC) and/or WHS&E (SINSW);
- Co-ordinate action in emergency situations and allocate required resources;
- Stop activities where there is an actual or immediate risk of harm to the environment;
- Plan construction works in a manner that avoids or minimizes impact to environment;
- Ensure the requirements of this CEMP are fully implemented;
- Ensure construction personnel manage construction works in accordance with statutory and approval requirements;
- Support the WHS&E and/or EMR in achieving the project environmental objectives;
- Ensure environmental management procedures and protection measures are implemented;
- Ensure all Project personnel attend an induction prior to commencing works;
- Liaise with School Infrastructure NSW and the Department of Education and other government authorities as required;
- Stop work immediately if an unacceptable impact on the environment is likely to occur;
- Undertake any environmental duties as defined by the Superintendent or Project / Site Engineer;
- Control field works and implement/maintain effective environmental controls;
- Where required, undertake environmental risk assessment of works prior to commencement;
- Ensure all site workers are site inducted prior to commencement of works;
- Attend to any spills or environmental incidents that may occur on-site;
- Report any activity that has resulted, or has the potential to result, in an environmental incident immediately to the Superintendent, and;
- Stop activities where there is an actual or immediate risk of harm to the environment and advise the Project Manager, ESR and/or EMR.

1.6.3 Work Health Safety & Environmental Advisor (WHS&E)

- Liaison with the Principal and with all relevant authorities on environmental matters.
- Maintaining a register of all environmental management documents for the Contract.
- Ensuring that the CEMP is established, implemented and maintained in compliance with the Conditions of Consent, including all Sub-Plans and procedures, and upgrades to these documents (as needed) to remain current with the progress of the Works.
- Overall responsibility for the establishment, management, monitoring and maintenance of erosion and sediment controls within the Site.
- Carrying out regular inspections and auditing of the works to ensure that environmental safeguards are being followed.
- Identifying where the implemented environmental measures are not meeting the targets set and identifying areas where improvement can be achieved.
- Preparing monthly reports outlining the works that have been undertaken and the achievements that have been met, as well as identifying those areas where improvements were made.
- Facilitating environmental induction and toolbox talks for all site personnel.

- Specific authority to stop work on any activity where the ESR deems it necessary to prevent environmental nonconformities.
- Notification to relevant parties of any environmental incidents.
- Ensure that all community consultation activities are carried out
- Report any environmental issues to the ESR raised by stakeholders or members of the community
- Communicate general Project progress, performance and issues to stakeholders including the community
- Maintain the 24 hour complaints hotline and complaints register

1.6.4 Contractor Project/Site Engineers

- Provide input into the preparation of environmental planning documents as required
- Ensure that instructions are issued and adequate information provided to employees that relate to environmental risks on-site
- Ensure that the works are carried out in accordance with the requirements of the CEMP and supporting documentation, including the implementation of all environmental controls
- Identify any environmental risks
- Identify resource needs for implementation of CEMP requirements and related documents.
- Ensure that complaints are investigated to ensure effective resolution
- Take action in the event of an emergency and allocate the required resources to minimise the environmental impact
- Report any activity that has resulted, or has the potential to result, in an environmental incident immediately to the Superintendent and the WHS&E and/or EMR.

1.6.5 Wider Project Team (including sub-contractors)

- Comply with the relevant requirements of the CEMP, or other environmental management guidance as instructed by a member of the Project's management
- Participate in the mandatory Project/site induction program
- Report any environmental incidents to the foreman immediately or as soon as practicable if reasonable steps can be adopted to control the incident
- Undertake remedial action as required to ensure environmental controls are maintained in good working order
- Stop activities where there is an actual or immediate risk of harm to the environment and advise the Project Manager, Construction Manager, Superintendent or WHS&E (and EMR if required).

1.7 Implementation

The CEMP for this project has been prepared in accordance with *Guideline for the Preparation of Environmental Management Plans* (DIPNR) and all relevant licences, permits and approvals for the project.

The CEMP will assist in guiding the Project Managers, Construction Managers and Contractors responsible for the construction of the proposed works to mitigate environmental risk associated with the works. Under B15 of the Conditions of Consent the CEMP must be prepared and approved prior to the commencement of construction activities and shall include the following items:

(a) Details of:

- i) hours of work;
- i) 24-hour contact details of site manager;

- ii) management of dust and odour to protect the amenity of the neighbourhood;
 - iii) stormwater control and discharge;
 - iv) measures to ensure that sediment and other materials are not tracked onto the roadway by vehicles leaving the site;
 - v) groundwater management plan including measures to prevent groundwater contamination;
 - vi) external lighting in compliance with AS 4282-1997 Control of the obtrusive effects of outdoor lighting;
 - vii) community consultation and complaints handling;
- (b) Construction Traffic and Pedestrian Management Sub-Plan (see condition B16);
- (c) Construction Noise and Vibration Management Sub-Plan (see condition B17);
- (d) Construction Waste Management Sub-Plan (see condition B18);
- (e) Construction Soil and Water Management Sub-Plan (see condition B19);
- (f) Biodiversity Management Sub-Plan (see condition B20);
- (g) an unexpected finds protocol for contamination and associated communications procedure to ensure that potentially contaminated material is appropriately managed;
- (h) an unexpected finds protocol for Aboriginal and non-Aboriginal heritage and associated communications procedure; and
- (i) waste classification (for materials to be removed) and validation (for materials to remain) be undertaken to confirm the contamination status in these areas of the site.

The following table (Table 1-1) is a list of the conditions of consent relevant for construction activities.

Table 1-1 Conditions of Consent for Construction Activities

Aspect / Impact	Condition Number	Condition Requirement / Safeguard	Timing	Relevant Section of CEMP / Sub Plan
General	C4	Construction, including the delivery of materials to and from the site, may only be carried out between the following hours: (a) between 7am and 6pm, Mondays to Fridays inclusive; and (b) between 8am and 1pm, Saturdays. No work may be carried out on Sundays or public holidays.	Construction	CEMP Section 1.2 NVMP Section 6.3
General	C9	The Applicant must carry out the construction of the development in accordance with the most recent version of the CEMP (including Sub-Plans).	Construction	CEMP Section 1.6.3
Notification / Consultation	B1	The Applicant must notify the Planning Secretary in writing of the dates of the intended commencement of construction and operation at least 48 hours before those dates	Pre-Construction	N/A

Aspect / Impact	Condition Number	Condition Requirement / Safeguard	Timing	Relevant Section of CEMP / Sub Plan
Notification / Consultation	B2	If the construction or operation of the development is to be staged, the Planning Secretary must be notified in writing at least 48 hours before the commencement of each stage, of the date of commencement and the development to be carried out in that stage.	Pre-Construction	N/A
Notification / Consultation	B9	No later than 48 hours before the commencement of construction, a Community Communication Strategy must be submitted to the Planning Secretary for information. The Community Communication Strategy must provide mechanisms to facilitate communication between the Applicant, the relevant Council and the community (including adjoining affected landowners and businesses, and others directly impacted by the development), during the design and construction of the development and for a minimum of 12 months following the completion of construction.	Pre-Construction	CEMP Section 4
Notification / Consultation	C1	A site notice(s) must be prominently displayed at the boundaries of the site during construction for the purpose of informing the public of project details	Pre / During Post Construction	N/A
Notification / Consultation	C7	Notification of such construction activities as referenced in condition C6 must be given to affected residents before undertaking the activities or as soon as is practical afterwards	Construction	CEMP Section 4 NVMP
Heritage	B11	Prior to the commencement of construction, a photographic archival recording of the external and internal areas of the building and all other elements of significance on the site identified in the Historical Heritage Assessment prepared by Indigeco must be prepared in accordance with the NSW Heritage Branch guidelines titled photographic Recording of Heritage Items using Film or Digital Capture. A digital copy must be submitted to Council, any relevant local studies collection in the locality and the Planning Secretary prior to the commencement of demolition of the Kingscliff Public School Building.	Pre-Construction	CEMP
Heritage	C27	In the event that surface disturbance identifies a new Aboriginal object, all works must halt in the immediate area to prevent any further impacts to the object(s). A suitably qualified archaeologist and the registered Aboriginal representatives must be contacted to determine the significance of the objects. The site must be registered in the Aboriginal Heritage Information Management System (AHIMS) which is managed by Heritage NSW under Department of Premier and Cabinet and the management outcome for the site included in the information provided to	Construction	CEMP Section 6

Aspect / Impact	Condition Number	Condition Requirement / Safeguard	Timing	Relevant Section of CEMP / Sub Plan
		AHIMS. The Applicant must consult with the Aboriginal community representatives, the archaeologists and Heritage NSW to develop and implement management strategies for all objects/sites. Works may only recommence with the written approval of Heritage NSW.		
Heritage	C28	If any unexpected archaeological relics are uncovered during the work, then all works must cease immediately in that area and the Heritage NSW contacted. Depending on the possible significance of the relics, an archaeological assessment and management strategy may be required before further works can continue in that area. Works may only recommence with the written approval of Heritage NSW.	Construction	CEMP Section 6
Noise	C2	All construction plant and equipment used on site must be maintained in a proper and efficient condition and operated in a proper and efficient manner	Pre-Construction	NVMP
Noise	C5	Notwithstanding condition C4, provided noise levels do not exceed the existing background noise level plus 5dB, works may also be undertaken during the following hours: (a) between 6pm and 7pm, Mondays to Fridays inclusive; and (b) between 1pm and 4pm, Saturdays.	Construction	NVMP
Noise	C6	Construction activities may be undertaken outside of the hours in condition C4 and C5 if required: (a) by the Police or a public authority for the delivery of vehicles, plant or materials; or (b) in an emergency to avoid the loss of life, damage to property or to prevent environmental harm; or (c) where the works are inaudible at the nearest sensitive receivers; or (d) where a variation is approved in advance in writing by the Planning Secretary or his nominee if appropriate justification is provided for the works	Construction	NVMP
Noise	C8	Rock breaking, rock hammering, sheet piling, pile driving and similar activities may only be carried out between the following hours: (a) 9am to 12pm, Monday to Friday; (b) 2pm to 5pm Monday to Friday; and (c) 9am to 12pm, Saturday	Construction	NVMP
Noise	C13	The development must be constructed to achieve the construction noise management levels detailed in the Interim Construction Noise Guideline (DECC, 2009). All feasible and reasonable noise mitigation measures must be implemented and any activities that could exceed the construction noise management levels must be identified and managed in accordance with the management and mitigation measures identified in the approved Construction Noise and Vibration Management Plan	Construction	NVMP

Aspect / Impact	Condition Number	Condition Requirement / Safeguard	Timing	Relevant Section of CEMP / Sub Plan
Noise	C15	The Applicant must implement, where practicable and without compromising the safety of construction staff or members of the public, the use of 'quackers' to ensure noise impacts on surrounding noise sensitive receivers are minimised.	Construction	NVMP
Noise	C14	The Applicant must ensure construction vehicles (including concrete agitator trucks) do not arrive at the site or surrounding residential precincts outside of the construction hours of work outlined under condition C4.	Construction	NVMP
Vibration	B5	Prior to the commencement of construction, the Applicant must: (a) consult with the relevant owner and provider of services that are likely to be affected by the development to make suitable arrangements for access to, diversion, protection and support of the affected infrastructure; (b) prepare a Pre-Construction Dilapidation Report identifying the condition of all public infrastructure in the vicinity of the site (including roads, gutters and footpaths); and (c) submit a copy of the Pre-Construction Dilapidation Report to the owner, Certifier and Council; and (d) provide a copy of the Pre-Construction Dilapidation Report to the Planning Secretary when requested.	Pre-Construction	NVMP
Vibration	B6	Prior to the commencement of any vibration generating works that could impact on the buildings surveyed as required by condition B7, the Applicant must: (a) Provide a copy of the relevant survey to the owner of each residential building surveyed in the form of a Pre-Construction Survey Report; (b) Submit a copy of the Pre-Construction Report to the Certifier; and Provide a copy of the Pre-Construction Survey Report to the Planning Secretary when requested.	Pre-Construction	NVMP
Vibration	C16	Vibration caused by construction at any residence or structure outside the site must be limited to: (a) for structural damage, the latest version of DIN 4150-3 (1992-02) Structural vibration - Effects of vibration on structures (German Institute for Standardisation, 1999); and (b) for human exposure, the acceptable vibration values set out in the Environmental Noise Management	Construction	NVMP

Aspect / Impact	Condition Number	Condition Requirement / Safeguard	Timing	Relevant Section of CEMP / Sub Plan
		Assessing Vibration: a technical guideline (DEC, 2006) (as may be updated or replaced from time to time).		
Vibration	C17	Vibratory compactors must not be used closer than 30 metres from residential buildings unless vibration monitoring confirms compliance with the vibration criteria specified in condition C16.	Construction	NVMP
Vibration	C18	The limits in conditions C16 and C17 apply unless otherwise outlined in a Construction Noise and Vibration Management Plan, approved as part of the CEMP required by condition B17 of this consent	Construction	NVMP
Light Spill	B12	Prior to commencement of lighting installation, evidence must be submitted to the satisfaction of the Certifier that all outdoor lighting within the site has been designed to comply with AS 1158.3.1:2005 Lighting for roads and public spaces – Pedestrian area (Category P) lighting – Performance and design requirements and AS 4282-2019 Control of the obtrusive effects of outdoor lighting.	Pre-Construction	CEMP Section 3
Light Spill	C35	The Applicant must ensure that all external lighting is constructed and maintained in accordance with AS 4282-2019 Control of the obtrusive effects of outdoor lighting.	Construction	CEMP Section 3
Construction Traffic	B22	Prior to the commencement of construction, evidence of compliance of construction parking and access arrangements with the following requirements must be submitted to the Certifier: (a) all vehicles must enter and leave the site in a forward direction; (b) the swept path of the longest construction vehicle entering and exiting the site in association with the new work, as well as manoeuvrability through the site, is in accordance with the latest version of AS 2890.2; and (c) the safety of vehicles and pedestrians accessing adjoining properties, where shared vehicle and pedestrian access occurs, has been addressed.	Pre-Construction	Construction Traffic and Pedestrian Management Plan
Construction Traffic	B23	Prior to the commencement of construction, the Applicant must submit a Construction Worker Transportation Strategy to the Certifier. The Strategy must detail the provision of sufficient parking facilities or other travel arrangements for construction workers in order to minimise demand for parking in nearby public and residential streets or public parking facilities. A copy of the strategy must be provided to the Planning Secretary for information.	Pre-Construction	Construction Traffic and Pedestrian Management Plan
Construction Traffic	C10	All construction vehicles (excluding site personnel vehicles) must be contained wholly within the site, except	Construction	Construction Traffic and

Aspect / Impact	Condition Number	Condition Requirement / Safeguard	Timing	Relevant Section of CEMP / Sub Plan
		if located in an approved on-street work zone, and vehicles must enter the site or an approved on-street work zone before stopping.		Pedestrian Management Plan
Air Quality	C20	The Applicant must take all reasonable steps to minimise dust generated during all works authorised by this consent.	Construction	CEMP Section 2
Air Quality	C21	During construction, the Applicant must ensure that: (a) activities are carried out in a manner that minimises dust including emission of windblown or traffic generated dust; (b) all trucks entering or leaving the site with loads have their loads covered; (c) trucks associated with the development do not track dirt onto the public road network; (d) public roads used by these trucks are kept clean; and (e) land stabilisation works are carried out progressively on site to minimise exposed surfaces.	Construction	CEMP Section 2
Biodiversity	B20	The Applicant must provide a Biodiversity Management Sub-Plan (BMSP) which must address, but not be limited to, the following: (a) be prepared by a suitably qualified and experienced person/s; (b) identify the areas of land where impacts on biodiversity are to be avoided as outlined in the biodiversity development assessment report prepared by Kleinfelder dated 6 May 2021 and set out how these areas will be protected from construction impacts ; and (c) set out the measures identified in the Biodiversity Development Assessment Report to minimise, mitigate and manage impacts on biodiversity, including timing and responsibility for delivery of the measures.		
Flora and Fauna	C19	For the duration of the construction works: (a) street trees must not be trimmed or removed unless it forms a part of this development consent or prior written approval from Council is obtained or is required in an emergency to avoid the loss of life or damage to property; (b) all street trees immediately adjacent to the approved disturbance area / property boundary must be protected at all times during construction in accordance with Council's tree protection requirements. Any street tree, which is damaged or removed during construction due to an emergency, must be replaced, to the satisfaction of Council; (c) all trees on the site that are not approved for removal must be suitably protected during construction as per the recommendations of the Arboricultural Impact Assessment	Construction	Biodiversity Management Plan

Aspect / Impact	Condition Number	Condition Requirement / Safeguard	Timing	Relevant Section of CEMP / Sub Plan
		<p>prepared by Treescience Pty Ltd and dated May 2021; and,</p> <p>(d) if access to the area within any protective barrier is required during the works, it must be carried out under the supervision of a qualified arborist. Alternative tree protection measures must be installed, as required. The removal of tree protection measures, following completion of the works, must be carried out under the supervision of a qualified arborist and must avoid both direct mechanical injury to the structure of the tree and soil compaction within the canopy or the limit of the former protective fencing, whichever is the greater</p>		
Soil Contamination	B38	<p>Where demolition works to a building require the removal of building slab on ground, prior to the disturbance of the slab, the Applicant must conduct site investigations to confirm if the site is contaminated by organochloride pesticides and comply with the following requirements:</p> <p>(a) the site investigations must be undertaken, and the subsequent report(s) must be prepared, in accordance with relevant guidelines made or approved by the EPA under section 105 of the <i>Contaminated Land Management Act 1997</i> and Council's Pre-Demolition Testing Guideline; and</p> <p>(b) the reports must be prepared, or reviewed and approved, by consultants certified under either the Environment Institute of Australia and New Zealand's Certified Environmental Practitioner (Site Contamination) scheme (CEnvP(SC)) or the Soil Science Australia Certified Professional Soil Scientist Contaminated Site Assessment and Management (CPSS CSAM) scheme.</p>	Pre-Construction	Soil and Water Management Plan
Soil Contamination	C22	<p>The Applicant must:</p> <p>(a) ensure that only VENM, ENM, or other certifiable material consistent with EPA Waste Classification Guidelines or approved in writing by EPA is brought onto the site;</p> <p>(b) keep accurate records of the volume and type of fill to be used; and</p> <p>(c) make these records available to the Certifier upon request.</p> <p>(d) ensure the exportation of waste (including fill or soil) from the site is in accordance with the provisions of the <i>Protection of the Environment Operations Act 1997</i> and the NSW Environment Protection Authority "Waste Classification Guidelines"; and</p> <p>(e) ensure the exportation of waste is transported to a licenced waste facility or an approved site subject to a resource recovery order and exemption</p>	Construction	Soil and Water Management Plan
Soil Contamination	C34	<p>Remediation of the site must be carried out in accordance with the Remediation Action Plan approved by an NSW EPA-accredited Site Auditor</p>	Construction	Soil and Water Management Plan

Aspect / Impact	Condition Number	Condition Requirement / Safeguard	Timing	Relevant Section of CEMP / Sub Plan
Soil Contamination	B39	Where remediation is carried out / completed in stages, a NSW EPA-accredited Site Auditor must confirm satisfactory completion of each stage by the issuance of Interim Audit Advice(s) prior to the use / operation of the remediated area(s).	Construction	Soil and Water Management Plan
Site Contamination	B40	The Applicant must ensure the proposed development does not result in a change of risk in relation to any pre-existing contamination on the site that would result in significant contamination	Construction	Soil and Water Management Plan
Water Quality	C23	Adequate provisions must be made to collect and discharge stormwater drainage during construction to the Certifier. The prior written approval of Council must be obtained to connect or discharge site stormwater to Council's stormwater drainage system or street gutter.	Construction	Soil and Water Management Plan
Water Quality	B32	Within six months of the commencement of construction, the Applicant must design an operational stormwater management system for the development and submit it to the satisfaction of the Certifier. The system must: <ul style="list-style-type: none"> (a) be designed by a suitably qualified and experienced person(s); (b) be generally in accordance with the design in the RtS; (c) include the OSD system being constructed under Part 5 of EP&A Act as described in the RtS; (d) be in accordance with applicable Australian Standards; and (e) ensure that the system capacity has been designed in accordance with Australian Rainfall and Runoff (Engineers Australia, 2016) and Managing Urban Stormwater: Council Handbook (EPA, 1997) guidelines 	Construction	Soil and Water Management Plan
Amenity	C12	The public way (outside of any approved construction works zone) must not be obstructed by any materials, vehicles, refuse, skips or the like, under any circumstances.	Construction	Construction Traffic Management Plan
Waste Management	C29	All waste generated during construction must be secured and maintained within designated waste storage areas at all times and must not leave the site onto neighbouring public or private properties.	Construction	Waste Management Plan
Waste Management	C30	All waste generated during construction must be assessed, classified and managed in accordance with the Waste Classification Guidelines Part 1: Classifying Waste (EPA, 2014).	Construction	Waste Management Plan

Aspect / Impact	Condition Number	Condition Requirement / Safeguard	Timing	Relevant Section of CEMP / Sub Plan
Waste Management	C31	The Applicant must ensure that concrete waste and rinse water are not disposed of on the site and are prevented from entering any natural or artificial watercourse.	Construction	Waste Management Plan
Waste Management	C32	The Applicant must record the quantities of each waste type generated during construction and the proposed reuse, recycling and disposal locations for the duration of construction.	Construction	Waste Management Plan
Waste Management	C33	The Applicant must ensure that the removal of hazardous materials, particularly the method of containment and control of emission of fibres to the air, and disposal at an approved waste disposal facility is in accordance with the requirements of the relevant legislation, codes, standards and guidelines.	Construction	Waste Management Plan
Emergency Response	C24	The Applicant must prepare and implement awareness training for employees and contractors, including locations of the assembly points and evacuation routes, for the duration of construction.	Construction	CEMP Section 1.10
Auditing	A22	Any condition of this consent that requires the carrying out of monitoring or an environmental audit, whether directly or by way of a plan, strategy or program, is taken to be a condition requiring monitoring or an environmental audit under Division 9.4 of Part 9 of the EP&A Act. This includes conditions in respect of incident notification, reporting and response, non-compliance notification, Site audit report and independent auditing	Construction	CEMP Section 1.10 and 1.11
Auditing	C36	Proposed independent auditors must be agreed to in writing by the Planning Secretary prior to the commencement of an Independent Audit	Construction	N/A
Auditing	C37	Independent Audits of the development must be conducted and carried out in accordance with the Independent Audit Post Approval Requirements.	Construction	N/A
Auditing	C38	The Planning Secretary may require the initial and subsequent Independent Audits to be undertaken at different times to those agreed to above, upon giving at least 4 week's notice to the Applicant of the date or timing upon which the audit must be commenced.	Construction	CEMP Section 1.11
Auditing	C39	In accordance with the specific requirements in the Independent Audit Post Approval Requirements, the Applicant must: (a) review and respond to each Independent Audit Report prepared under condition C38 of this consent, or condition C39 where notice is given; (b) submit the response to the Planning Secretary; and (c) make each Independent Audit Report and response to	Post-Construction	CEMP Section 1.11

Aspect / Impact	Condition Number	Condition Requirement / Safeguard	Timing	Relevant Section of CEMP / Sub Plan
		it publicly available within 60 days after submission to the Planning Secretary.		
Auditing	C40	Independent Audit Reports and the applicant/proponent's response to audit findings must be submitted to the Planning Secretary within 2 months of undertaking the independent audit site inspection as outlined in the Independent Audit Post Approval Requirements unless otherwise agreed by the Planning Secretary.	Post-Construction	CEMP Section 1.11
Auditing	C41	Notwithstanding the requirements of the Independent Audit Post Approval Requirements, the Planning Secretary may approve a request for ongoing independent operational audits to be ceased, where it has been demonstrated to the Planning Secretary's satisfaction that an audit has demonstrated operational compliance.	Post-Construction	CEMP

1.7.1 Induction

All personnel (including sub-contractors) will attend a compulsory site induction that includes an environmental component prior to commencement on-site. This is done to ensure all personnel involved in the Project are aware of the requirements of the CEMP.

Short-term visitors to site undertaking inspections / entering the site (such as regulators) will be required to undertake a visitors induction and be accompanied by inducted personnel at all times.

Temporary visitors to site for purposes such as deliveries will be required to be accompanied by inducted personnel at all times.

The construction WHS&E (or delegate) will conduct the environmental component of the site inductions.

The environmental component must cover all elements of the CEMP and would include as a minimum:

- Relevant details of the CEMP including purpose and objectives
- Requirements of due diligence and duty of care
- Conditions of environmental licences, permits and approvals
- Potential environmental emergencies on Site and the emergency response procedures
- Reporting and notification requirements for pollution and other environmental incidents
- High risk activities and associated environmental safeguards
- Working in or near environmentally sensitive areas
- Specific environmental management requirements and responsibilities
- Mitigation measures for the control of environmental issues
- Incident response and reporting requirements
- Information relating to the location of environmental constraints
- Key environmental issues

A record of all environment inductions will be maintained and kept on-site. The construction WHS&E may authorise amendments to the induction at any time. Possible reasons for changes to the induction may be Project modifications, legislative changes or amendments to this CEMP or related documentation.

An Induction Register is kept on site.

1.7.2 Pre-Start Meetings

The pre-start meeting is a tool for informing the workforce of the day's activities, safe work practices, environmental protection practices, work area restrictions, activities that may affect the works, coordination issues with other trades, hazards and other information that may be relevant to the day's work.

The Site Construction Manager will conduct a daily pre-start meeting with the site workforce before the commencement of work each day (or shift) or where changes occur during a shift. Daily pre-start meetings are generally succinct in nature and will take approximately 10-15 minutes.

The environmental component of pre-starts will be determined by the WHS&E and will include any environmental issues that could potentially be impacted by, or impact on, the day's activities. All attendees will be required to sign on to the pre-start and acknowledge their understanding of the issues explained.

1.7.3 Toolbox Talks

Toolbox talks will be one method of raising awareness and educating personnel on issues related to all aspects of construction including environmental issues. The toolbox talks are used to ensure environmental awareness continues throughout construction and shall be facilitated by the Environmental Site Representative.

Toolbox talks will also be tailored to specific environmental issues relevant to upcoming works.

Relevant environmental issues include (but are not limited to):

- Erosion and Sedimentation Control
- Dewatering / Stormwater Management
- Hours of Work
- Emergency and Spill Response
- Aboriginal and Non-Aboriginal heritage
- Biodiversity and biosecurity
- Noise and Vibration
- Dust Control

Toolbox talk attendance is mandatory and attendees of toolbox talks are required to sign an attendance form and the records maintained.

Targeted environmental awareness training will be provided to individuals or groups of workers with a specific authority or responsibility for environmental management or those undertaking an activity with a high risk of environmental impact. Topics covered may include those detailed above, or others deemed necessary in the lead up to or during construction.

Another way to inform construction personnel will be through the development and distribution of awareness notes. These will typically take the form of a poster, booklet, or similar and will be distributed to Engineers, Leading Hands, Foreman and others with a responsibility for managing specific work locations or activities. This documentation will be used to inform the broader workforce through either daily pre-starts meeting or provision in worker crib sheds / break facilities.

A Training Register is kept on site.

1.8 Relevant Legislation

The legislation below is current at the time of submission of the CEMP for approval and will be updated thereafter as legislative changes occur, and/or legal requirements become relevant.

A register of legal requirements for the Project is contained in the EIS Documentation. This register will be reviewed at regular intervals, such as during management reviews, and updated with any

applicable changes. Any changes made to the legal requirements register will be communicated to the wider project team, including subcontractors where necessary through toolbox talks, specific training and other methods.

The construction project team will regularly review legal and other requirements and ensure the register remains up to date and current.

Table 1-2 Relevant Legislation

Act / Regulation / Planning Policy	Interaction with Consent / Development	Jurisdiction
EP&A Regulation 2000	<p>The EP&A Regulation requires the following four (4) principles of ecologically sustainable development be considered in assessing a project:</p> <ul style="list-style-type: none"> • The precautionary principle; • Intergenerational equity; • Conservation of biological diversity and ecological integrity; and • Improved valuation and pricing of environmental resources. 	National
State Environmental Planning Policy (State and Regional Development) 2011	State Environmental Planning Policy (State and Regional Development) 2011 (SRD SEPP) identifies development and infrastructure that is State and Regionally significant.	State
State Environmental Planning Policy (Educational Establishments and Child Care Facilities) 2017	State Environmental Planning Policy (Educational Establishments and Child Care Facilities) 2017 (Education SEPP) aims to (amongst other things) streamline the planning system for education and childcare facilities including changes to exempt and complying development.	State
State Environmental Planning Policy (Infrastructure) 2007	ISEPP 2007 provides a consistent planning regime for infrastructure and the provision of services across NSW, along with providing for consultation with relevant public authorities during the assessment process. The ISEPP supports greater flexibility in the location of infrastructure and service facilities along with improved regulatory certainty and efficiency.	State
State Environmental Planning Policy No. 55 – Remediation of Land	SEPP 55 prescribes a statutory process associated with the development of land that is contaminated and needs remediation.	State
State Environmental Planning Policy (Coastal Management) 2018	The site is mapped as being within the Coastal Environmental Area and Coastal Use under the Coastal Management SEPP (Clauses 13 and 14 of the Coastal Management SEPP).	State
Biodiversity Conservation Act 2016	The Biodiversity Conservation Act 2016 (BC Act) and its supporting regulations set out the environmental impact assessment framework for threatened species, threatened ecological communities and Areas of Outstanding Biodiversity Value (formerly critical habitat) for Division 5.1 activities (amongst other types of development).	National

Act / Regulation / Planning Policy	Interaction with Consent / Development	Jurisdiction
Protection of the Environment Operations Act 1997	The Protection of the Environment Operations Act 1997 (POEO Act) focuses on environmental protection and provisions for the reduction of water, noise and air pollution and the storage, treatment and disposal of waste. The POEO Act introduces licensing provisions for scheduled activities that are of a nature and scale that have a potential to cause environmental pollution. It also includes measures to limit pollution and manage waste	National
Heritage Act 1977	The Heritage Act 1977 provides for the protection or conservation of buildings, works, maritime heritage (wrecks), archaeological relics and places of heritage value through their listing on various State and local registers. The Act makes it an offence to harm any non-Aboriginal heritage values without approval.	National
Environment Protection and Biodiversity Conservation Act 1999	Under the Environment Protection and Biodiversity Conservation Act 1999 (EPBC Act) a referral is required to the Australian Government for proposed 'actions that have the potential to significantly impact on matters of national environmental significance (MNES) or the environment of Commonwealth land'	National
Tweed Local Environmental Plan 2014	Local environmental planning provisions.	Local
Tweed Development Control Plan 2008	Local Planning Provisions	Local

1.9 Communication

1.9.1 Internal Communication

Clear lines of communication throughout all levels and functions (e.g. management, staff and sub-contracted service providers), is key to minimising environmental impacts and achieving continual improvements in environmental performance.

The construction team will meet regularly to discuss any issues with environmental management on-site, any amendments to plans that might be required or any new/changed construction activities.

Regular meetings may also be scheduled with relevant authorities (SINSW, EPA, DPIE) and the WHS&E. The purpose of these meetings would be to communicate ongoing environmental performance and to identify any issues to be addressed.

In addition, construction team members will participate in toolbox talks on at least a weekly basis. This forum will provide an opportunity for the environment team members to communicate on environmental performance, to advise on any upcoming sensitive environmental matters for future work areas and to receive feedback from on-site personnel.

Further internal communications regarding environmental issues and aspects will be through awareness training as described in Section 1.7.3.

1.9.2 Liaisons with EPA and Government Authority Consultation

The WHS&E has the responsibility of reporting on the ongoing environmental performance of the Project to the EMR (SINSW). The construction ESR will report regularly to SINSW on progress and any key environmental matters.

The Project Manager and the WHS&E are the two 24-hour contacts. They have the authority to halt the progress of the works if necessary. They are the key emergency response personnel during an environmental site emergency.

The EMR is the authorised contact person for communications with the client and Agencies on environmental matters.

1.9.3 Community Liaison and/or Notification

RCC will develop a Community Consultation Strategy that facilitates the mechanism for communication with all stakeholders which will be developed in accordance with the Community Involvement and Communications Resource Manual (RTA, 2008). Consultation will be undertaken with potentially affected residences prior to the commencement of and during works. Consultation would include newsletters or letterbox drops providing information on the proposed works, working hours and a contact name and number for more information or to register complaints.

Local residents will be notified about any new or changed construction activities which will affect access to their properties or otherwise disrupt the stakeholders and residents' use of their property, at least 5 working days before commencing work affecting residents. Such notification will state the nature of the work, why it is necessary, the expected duration, details of any changes to the traffic arrangements or property access and the name and contact telephone number of the Project Manager who can respond to any resident concerns.

Staff and sub-contractors would be made aware of these procedures and trained in their application via Toolbox Talks.

1.9.4 Complaints Management

As part of the Community Communication Strategy, a Complaints and Enquiries Procedure, consistent with AS 4269: Complaints Handling, will be developed for the Project, in accordance with the requirements of the Conditions of Consent. A Communications Register is kept on site.

All community inquiries and complaints related to the construction activities will be referred to:

SINSW Complaints Line	1300 482 651	24-Hour Toll Free
------------------------------	---------------------	--------------------------

An initial response to complaints will be provided within 24 hours of a complaint being received. A further detailed response, including steps taken to resolve the issue(s) that lead to the complaint, will be provided within 10 days. All complaints will be closed off in the stakeholder database. At all times the stakeholder will be kept informed of when they will receive a response.

The construction WHS&E will apply an adaptive approach to ensure that corrective actions are applied in consultation with the appropriate construction staff to allow modifications and improvements in the management of any environmental issues resulting in community complaints. Within one working day of receiving a complaint about any environmental issue, including any pollution incidents, arising from the Work Under the Contract, a written report will be submitted to the Principal detailing the complaint and the action taken to remedy the problem. A final report together with proposed measures to prevent the recurrence of such incidents would be submitted to the Principal within 5 working days.

A register of all complaints will be kept, which will include the following details:

- (a) date and time of complaint;

- (b) method by which the complaint was made (telephone, letter, meeting, etc);
- (c) name, address, contact telephone number of complainant (if no such details were provided, a note to that effect);
- (d) nature of complaint;
- (e) action taken in response including follow up contact with the complainant.;
- (f) any monitoring to confirm that the complaint has been satisfactorily resolved;
- (g) if no action was taken, the reasons why no action was taken.

1.10 Emergency and Incident Planning

The EPA will be notified of any pollution incidents on or around the site via the EPA Environment Line (telephone 131 555) in accordance with Part 5.7 of the *Protection of the Environment Operations Act 1997* (NSW) (POEO Act). The circumstances where this will take place include:

- i. it involves actual or potential harm to the health or safety of human beings or to ecosystems that is not trivial, or
- ii. it results in actual or potential loss or property damage of an amount, or amounts in aggregate, exceeding \$10,000 (or such other amount as is prescribed by the regulations)

The Department must be notified in writing to compliance@planning.nsw.gov.au immediately after the Applicant becomes aware of an incident. The notification must identify the development (including the development application number and the name of the development if it has one) and set out the location and nature of the incident including all records associated with the environmental incident and corrective and regulatory actions required.

1.11 Monitoring, Inspections and Auditing

This section includes a procedure to monitor and measure, on a regular basis, the environmental management performance and to evaluate compliance with specific conditions of consent.

1.11.1 Environmental Inspections

Copies of all environmental inspection reports will be kept with the project records (HammerTech) and closed out within the agreed timeframes.

1.11.2 Weekly and Post Rainfall Site Inspections

The WHS&E will undertake weekly and post rainfall inspections of the work sites to evaluate the effectiveness of environmental controls. The WHS&E will record inspection findings on an inspection checklist form.

If any maintenance and/or deficiencies in environmental controls or in the standard of environmental performance are observed, they will be recorded on the checklist form. Records will also include details of any maintenance required, the nature of the deficiency, any actions required and an implementation priority. Actions will be closed out in accordance with the identified priority and evidence of close out would be kept on file.

1.11.3 Pre - Work Inspections

Prior to the commencement of works on each shift, an inspection will be carried out and will include a check of relevant environmental controls and resources required to ensure effective operation and maintenance. Works are not to commence unless inspections are found to be satisfactory. The Construction Manager or delegate will undertake the inspections.

1.11.4 Environmental Monitoring

Where required, monitoring will be undertaken to validate the impacts predicted for the Project, to measure the effectiveness of environmental controls and implementation of this CEMP. The monitoring requirements for required aspects are included in the relevant environmental management sub plans.

1.11.5 Auditing

Independent auditing of the site will occur throughout all stages of construction. The purpose of these audits is to verify compliance with:

- This CEMP and Sub Plans
- Approval requirements
- Any relevant legal and other requirements (e.g. licenses, permits, regulations, DPIE contract documentation)

To ensure RCC complies with regulatory obligations, an audit checklist will be developed and amended as necessary to reflect changes to this CEMP, subsequent approvals and changes to Acts, Regulations or Guidelines. The Compliance and Safety Manager shall perform the audits. The results of each audit shall be documented and discussed with site staff and SINSW Auditor. Should corrective actions be identified these shall be agreed with the SINSW Auditor and implemented in a timely manner by the responsible site staff.

The Project Manager shall sign off on the audit form once all corrective actions have been completed.

The Table (Table 1-3) below presents the auditing requirements that are applicable to the Project.

Table 1-3 Auditing Requirements

No.	Audit	Requirement	Timing	Responsibility	Recipient
1	3 rd Party Audit	Independent Audits of the development must be conducted and carried out in accordance with the Independent Audit Post Approval Requirements.	The first audit within eight weeks of the notified commencement date of construction.	SINSW Delegated Auditor	Planning Secretary, Project Manager, DPIE
2	3 rd Party Audit	Independent Audits of the development must be conducted and carried out in accordance with the Independent Audit Post Approval Requirements..	A subsequent Independent Audit of construction must be undertaken no later than six months from the date of the initial construction Independent Audit	SINSW Delegated Auditor	Planning Secretary, Project Manager, DPIE
3	3 rd Party Audit	Independent Audits of the development must be conducted and carried out in accordance with the Independent Audit	The timing of ongoing Independent Audits shall be conducted at intervals agreed upon with the Planning Secretary	SINSW Delegated Auditor	Planning Secretary, Project Manager, DPIE

		Post Approval Requirements..			
--	--	------------------------------	--	--	--

RCC will complete Risks Assessments throughout the project for high risks activities and processes, and when site conditions change adversely. From here, management auditing tools will be used to assess the overall environmental compliance and assess the implementation of environmental hazard and risk controls. The following auditing tools will be used:

Considering the duration of the project, it is expected that a review of the effectiveness and implementation of the CEMP will be completed once during the project. This review will ensure that RCC environmental management processes and practices remain relevant to required Work Under the Contract.

The WHS&E, PM and a member of RCC’s management team will look into the system to assess the following;

- Identification of areas of opportunity for improvement in environmental performance on the project;
- Analysis of the non-conformities and deficiencies on the project and why these occurred;
- Verification of corrective and preventative actions raised following the issue of non-conformities;
- Highlighting any changes in procedure resulting from process improvement.

Independent Audit Reports and the applicant/proponent’s response to audit findings must be submitted to the Planning Secretary within 2 months of undertaking the independent audit site inspection as outlined in the Independent Audit Post Approval Requirements unless otherwise agreed by the Planning Secretary.

1.12 Environmental Nonconformities

Any member of the Project team may raise a non-conformance or improvement opportunity. The RCC Quality Plan Far North Coast Schools – Stage 2 Main Works (Kingscliff) 1227 Project management Plan describes the process for managing non-conforming work practises and initiating corrective/preventative actions or system improvements.

The DPIE Representative / Site Auditor or other public authority may also raise a non-conformance or improvement opportunity using the same process.

A non-conformance is the failure or refusal to comply with the requirements of this CEMP and supporting documentation.

For each non-conformance identified a corrective/preventative action (or actions) must be implemented. In addition any environmental management improvement opportunities can be initiated as a result of incidents or emergencies, monitoring and measurement, audit findings or other reviews. Improvement opportunities may also result in the implementation of corrective/preventative actions.

Corrective/preventative actions and improvement opportunities will be entered into the contractor’s quality system database and include details of the issue, action required and timing and responsibilities. The record will be updated with date of close out and any necessary notes. The database will be reviewed regularly to ensure actions are closed out as required.

Non-conforming activities may be stopped, if necessary, by the construction WHS&E and/or Site Construction Manager or delegate. The works will not commence until a corrective / preventative action has been closed out. DPIE may also stop works in these circumstances. In such circumstances a non-conformance report must be prepared in accordance with the Quality Plan.

The Planning Secretary must be notified through the major projects portal within seven days after the Applicant becomes aware of any non-compliance. The Certifier must also notify the Planning Secretary through the major projects portal within seven days after they identify any non-compliance.

1.13 Records of Environmental Activities

1.13.1 Environmental Records

The construction WHS&E is responsible for maintaining all environmental management documents and records as current at the point of use. Types of documents and records include:

- All site monitoring, inspection and compliance reports/records
- Correspondence with public authorities
- Internal and external audit reports
- Induction and training records
- Reports on environmental incidents, other environmental non-conformances, complaints and follow-up action
- Community engagement information
- Minutes of CEMP and construction environmental management system review meetings and evidence of any action taken
- CEMP and Sub Plans
- Waste register

All environmental management documents are subject to ongoing review and continual improvement. This includes times of change to scheduled activities or to legislative or licensing requirements.

Only the construction WHS&E, or delegate, has the authority to change any of the environmental management documentation. These documents would be held for five years after the actual completion date and be available to DPIE and EPA upon request.

1.13.2 Document Control

The WHS&E will coordinate the preparation, review and distribution, as appropriate, of the environmental documents and records referred to in this CEMP. During the Project, the environmental documents and records will be stored at the main site compound.

A register and distribution list will identify the current revision of particular documents, records or data.

1.14 Management Review

The Project Team will periodically review the effectiveness and implementation of the CEMP. The management review process will identify opportunities for continual improvement of the environmental management processes and practices and ensure that the CEMP remain relevant to the Work Under the Contract.

The outcomes of the reviews, where appropriate, will be included as amendments to this CEMP and related documentation, revision to the Project's environmental management system, risk assessment review, re-evaluation of the Project objectives and targets as well as feeding into other Project documents.

1.15 CEMP/Sub Plan Revision

A document review process ensures that environmental documentation including this CEMP is updated as appropriate for the specific works that are occurring on-site.

Should the document review process identify any issues or items within the documents that are either redundant or in need of updating, it is the responsibility of the WHS&E, or their delegate, to prepare the revised documents.

The revised document will then be issued to the Project Manager and the DPIE Certifier for endorsement of the changes.

Document review will occur:

- Following serious environmental incidents
- Upon identification of new risks, including risks identified during risk register updates
- When non-compliances are identified
- Following environmental audits that identify matters that require attention
- In response to project change (including modifications and amendments)
- Following changes to relevant legislative requirements.
- As part of a continuous improvement process.

A full copy of the sub plans associated with the CEMP are located in Appendix A to Appendix F.

2 Management of Dust and Odour

The management of dust and odour is to primarily protect the amenity of the neighbour and secondly to avoid environmental degradation.

The management of dust and odour impacts are achieved through the following measures.

2.1 Consent Requirements

In accordance with condition B15(a)(iii) of SSD-8378620, repeated in part as follows; the Construction Environmental Management Plan (CEMP) which must include, but is not limited to, the following; Management of dust and odour to protect the amenity of the neighbourhood. Whilst Condition C20 stipulates that the Applicant must take all reasonable steps to minimise dust generated during all works authorised by this consent.

This section of the CEMP addresses this condition, outlining the likely impacts of air quality and dust control for the various aspect of the construction works, along with the mitigation strategies that will be implemented to minimise these impacts on the neighbourhood.

2.2 Relevant Conditions to Consider

Condition C21 stipulates that during construction, the Applicant must ensure that:

- (a) exposed surfaces and stockpiles are suppressed by regular watering;
- (b) all trucks entering or leaving the site with loads have their loads covered;
- (c) trucks associated with the development do not track dirt onto the public road network;
- (d) public roads used by these trucks are kept clean; and
- (e) land stabilisation works are carried out progressively on site to minimise exposed surfaces.

2.3 Air Quality

2.3.1 Summary of potential impacts

Dust generation can occur at any time from exposed areas due to dry conditions, wind action, vehicle movements and several other sources consistent with earthworks. Increased levels of dust generation may occur during demolition, clearing and grubbing, excavation and stockpiling. Given the proximity to of neighbouring properties and existing buildings, there is the potential for impact by dust, particularly during windy conditions.

2.3.2 Mitigation Measures:

The following mitigation measures shall be adopted to reduce the impact on air quality and dust generation:

- Construction vehicles and equipment to be suitably serviced prior to commencement of construction activities and all necessary maintenance to be undertaken during the construction period to meet EPA air quality requirements.
- Excessive use of vehicles and powered construction equipment will be minimised where possible
- All construction machinery will be turned off when not in use to minimise emissions where possible.
- Construction contractors to monitor dust generation progressively.

- Dust suppression methods will be adopted where required (i.e. on windy days when earthworks and vehicle movements are generating dust).
- Examples of dust suppression methods include:
 - Water carts
 - Application of soil binding polymers
 - Localized use of water to suppress excavation activities as they are occurring to suppress dust
 - Covering stockpiles
 - Any stockpiled spoil/fill will be protected to minimize dust generation to avoid sediment moving offsite.
- Vehicles transporting spoil from the site to be covered where required.
- The burning of waste materials will not be permitted on site

2.3.3 Reporting / Compliance

All reporting and assessment of compliance shall be conducted as per the specifications listed Sections 1.11 and 1.13 of the Construction Environmental Management Plan.

If dust related complaints are generated from the construction activities, then RCC shall investigate the source of the dust generating activities and determine an appropriate course of action which may include ambient air quality monitoring. All complaints shall be handled as per the Community Consultation Strategy.

3 External Lighting

The management of external lighting is to primarily avoid light spill on surrounding sensitive receivers and road users within the localised area.

The management of light spill shall be achieved through the following measures.

3.1 Consent Requirements

In accordance with Condition B12 of SSD-8378620, repeated (in part) as follows; prior to commencement of lighting installation, evidence must be submitted to the satisfaction of the Certifier that all outdoor lighting within the site has been designed to comply with AS 1158.3.1:2005 Lighting for roads and public spaces – Pedestrian area (Category P) lighting – Performance and design requirements and AS 4282-2019 Control of the obtrusive effects of outdoor lighting.

4 Community Consultation and Complaints Handling

Consultation with stakeholders is key to preventing delays in the delivery of the project and mitigate backlash that may occur from an unsettled community.

The management of community consultation and complaints shall be achieved through the following measures.

4.1 Consent Requirements

In accordance with Condition B9 of SSD-8378620, repeated (in part) as follows; a Community Communication Strategy must be developed to provide mechanisms to facilitate communication between the Applicant, the relevant Council and the community (including adjoining affected landowners and businesses, and others directly impacted by the development), during the design and construction of the development.

4.2 Relevant Conditions

As per Condition B9, the Community Communication Strategy must:

- (a) identify people to be consulted during the design and construction phases;
- (b) set out procedures and mechanisms for the regular distribution of accessible information about or relevant to the development;
- (c) provide for the formation of community-based forums, if required, that focus on key environmental management issues for the development;
- (d) set out procedures and mechanisms:
 - (i) through which the community can discuss or provide feedback to the Applicant;
 - (ii) through which the Applicant will respond to enquiries or feedback from the community; and
 - (iii) to resolve any issues and mediate any disputes that may arise in relation to construction and operation of the development, including disputes regarding rectification or compensation.

The Community Communication Strategy must be submitted to the Planning Secretary for information no later than 48 hours before the commencement of any work.

The Community Communication Strategy, must be implemented for a minimum of 12 months following the completion of construction.

4.3 Communications Strategy

Community consultation is primarily the responsibility of the client. Richard Crookes Construction will ensure that the relevant strategies/outcomes are incorporated within the relevant management plans and construction process where possible. The main channels that the client is planning on conducting consultation is through the following:

- Community information phone line
- Community contact cards
- Door knocks
- Face-to-face meetings/briefings
- Fact sheets
- Information Booths
- Project updates
- Project Reference Group

- Website
- Works notifications
- Letterbox drops

4.4 Complaints Handling

The primary form of assistance that Richard Crookes Construction will provide is through the complaints handling process. During the project delivery phase, a complaint defined as in regards to construction impacts – such as – safety, dust, noise, traffic, congestion, loss of parking, contamination, loss of amenity, hours of work, property damage, property access, service disruption, conduct or behaviour of construction workers or other environmental impacts. If a complaint is made directly to RCC, it will be redirected to the following SINSW communication channels:

Phone: 1300 482 651

Email: schoolinfrastructure@det.nsw.edu.au

Upon receipt of the complaint from the Project Director, RCC will endeavour to close out the complaint in a timely manner. The complaint will be logged to ensure that the impact of future construction works that may impact the community in a similar manner are minimised.

5 Unexpected Finds Protocol for Contamination

5.1 Consent Requirement

In accordance with condition B15(b) of SSD-8378620, repeated in part as follows; the Construction Environmental Management Plan (CEMP) which must include, but is not limited to, the following; an unexpected finds protocol for contamination and associated communications procedure to ensure that potentially contaminated material is appropriately managed.

5.2 Summary of Protocol

If asbestos is detected in unexpected areas prior to, or during, site development works the following 'Unexpected Finds Protocol' will apply:

- a. Upon discovery of suspected asbestos containing material, the Construction Manager is to be notified and the affected area closed off by the use of barrier tape and warning signs. Warning signs shall be specific to Asbestos Hazards and shall comply with the AS1319-1994 – Safety Signs for the Occupational Environment.
- b. An Occupational Hygienist is to be notified to inspect the area and confirm the presence of asbestos and to determine the extent of remediation works to be undertaken. A report detailing this information would be compiled by the Occupational Hygienist and provided to the Principal (or their representative) and the Construction Manager.
- c. The location of the identified asbestos material would be surveyed using sub-meter Differential Global Positioning System (DGPS).
- d. If the impacted soil is to be disposed off site, it should be classified in accordance with the DECCW's Waste Classification Guidelines (2008) and disposed of, as a minimum, as asbestos contaminated waste to a suitably licensed landfill. In dry and windy conditions, the stockpile would be lightly wetted and covered with plastic sheet whilst awaiting disposal.
- e. All work associated with asbestos in soil would be undertaken by a contractor holding a class ASA Licence. WorkCover must be notified 7 days in advance of any asbestos works.
- f. Monitoring for airborne asbestos fibres is to be carried out during the soil excavation in asbestos contaminated materials.
- g. Documentary evidence (weighbridge dockets) of correct disposal is to be provided to the Principal (or their representative).
- h. At the completion of the excavation, a clearance inspection is to be carried out and written certification is to be provided by an Occupational Hygienist that the area is safe to be accessed and worked. If required, the filling material remaining in the inspected area can be covered/sealed by an appropriate physical barrier layer of non-asbestos containing material prior to sign-off.
- i. Validation samples would be collected from the remedial excavation to confirm the complete removal of the asbestos containing materials. If the asbestos pipes/conduits are uncovered, then sampling density would typically comprise one sample per 10-20 linear meter (depending on the length of the pipe). If asbestos debris are found, then the sampling density would typically comprise 1 sample per 5 metre x 5 metre grid.
- j. The sampling locations should be surveyed using a sub-meter DGPS.
- k. Details are to be recorded in the site record system.

l. Following clearance by an Occupational Hygienist, the area may be reopened for further excavation or construction work.

m. All information gathered as part of this investigation, clean up and reporting process shall be submitted to the Planning Secretary, prior to its removal from the site.

In the event that other sources of contamination are observed onsite then the following protocols should be adopted:

1. Immediately cease work and contact Site Foreman
2. Site Foreman to construct temporary barricading to prevent worker access to the unexpected substance(s) and install appropriate stormwater/sediment controls
3. Construction Manager to contact Client and arrange inspection by Environmental Consultant
4. Environmental Consultant to undertake detailed inspection and sampling & analysis as per the documented sampling procedures outlined in the RAP analytical results against documented site assessment criteria in the RAP
5. If substance assessed as presenting an unacceptable risk to human health
6. If substance assessed as not presenting an unacceptable risk to human health Site foreman to remove safety barricades and environmental controls and continue work
7. Environmental Consultant to supervise remediation and undertake validation/clearance as per the remediation/validation/clearance plan
8. Site Foreman to remove barricades and environmental controls and continue work.
9. Environmental Consultant to submit assessment/validation/clearance to Construction Manager for distribution to Client and/or delegate and appropriate Regulatory Authorities.

6 Unexpected Finds Protocol for Aboriginal and Non-Aboriginal Heritage

6.1 Consent Requirement

In accordance with condition B15(c) of SSD-8378620, repeated in part as follows; the Construction Environmental Management Plan (CEMP) which must include, but is not limited to, the following; an unexpected finds protocol for Aboriginal and non-Aboriginal heritage and associated communications procedure.

6.2 Summary of Protocol

6.2.1 Aboriginal Heritage Unexpected Finds Protocol

In the event that surface disturbance identifies a new Aboriginal object, all works must halt in the immediate area to prevent any further impacts to the object(s). A suitably qualified archaeologist and the registered Aboriginal representatives must be contacted to determine the significance of the objects. The site is to be registered in the Aboriginal Heritage Information Management System (AHIMS) which is managed by OEH and the management outcome for the site included in the information provided to AHIMS. The Applicant must consult with the Aboriginal community representatives, the archaeologists and OEH to develop and implement management strategies for all objects/sites. Works shall only recommence with the written approval of OEH. All waste generated during construction must be assessed, classified and managed in accordance with the Waste Classification Guidelines Part 1: Classifying Waste (EPA, 2014).

6.2.2 Non-Aboriginal Heritage Unexpected Finds Protocol

As stipulated in Condition C28, if any unexpected archaeological relics are uncovered during the work, then:

- (a) all works must cease immediately in that area and notice is to be given to Heritage NSW and the Planning Secretary;
- (b) depending on the possible significance of the relics, an archaeological assessment and management strategy may be required before further works can continue in that area as determined in consultation with Heritage NSW; and
- (c) works may only recommence with the written approval of the Planning Secretary. If any unexpected archaeological relics are uncovered during the work, then all works must cease immediately in that area and the OEH Heritage Division contacted. Depending on the possible significance of the relics, an archaeological assessment and management strategy may be required before further works can continue in that area. Works may only recommence with the written approval of Heritage Division of the OEH. The Applicant must ensure that concrete waste and rinse water are not disposed of on the site and are prevented from entering any natural or artificial watercourse.

6.3 Aboriginal Cultural Heritage Management Plan

Condition B24 stipulates that prior to the commencement of construction, the Applicant must prepare an Aboriginal Heritage Management Plan for the development to the satisfaction of the Planning Secretary. This plan must:

- (a) be prepared by suitably qualified and experienced persons;
- (b) be prepared in consultation with Registered Aboriginal Parties;
- (c) include a methodology for an archaeological excavation program of the site with consideration to understanding site characteristics and local and regional prehistory;
- (d) include a description of the measures that would be implemented for:
 - (i) protecting the Aboriginal heritage items identified within the project footprint or items located outside the approved development footprint, including fencing off the Aboriginal heritage items prior to commencing construction;
 - (ii) salvaging and relocating the Aboriginal heritage items located within the approved development footprint;
 - (iii) salvaging, relocating or avoiding any Aboriginal heritage items located within the approved development footprint identified during test excavations of the site;
 - (iv) include updated baseline mapping of the heritage items within and adjoining to the development disturbance area;
 - (v) include updated mapping of all areas that have been and will be subject to monitoring, test excavations, and salvage excavations;
 - (vi) include conservation options for the mitigation and avoidance to impacts on Aboriginal Heritage Information Management Systems registered sites situated within and outside the project footprint;
 - (vii) prepare a methodology outlining when Registered Aboriginal Parties must be notified of changes to the Aboriginal Heritage Management Plan;
 - (viii) include a procedure for assessing significance of Aboriginal Objects identified during the monitoring, test excavations, and salvage excavation and ensure that the management and mitigation measures are considered for all sites, and with special consideration for those of high significance; and
 - (ix) a strategy for the long term management of any Aboriginal heritage items or material collected during the test excavation or salvage works.

An investigation of Aboriginal cultural heritage for the project area was undertaken by Indigecco with technical assistance from EMN Consulting Pty Ltd. As a result of the investigation an Aboriginal cultural heritage management plan (ACHMP) dated 28 March 2022 prepared by EMN was developed to provide a framework for managing Aboriginal heritage during the pre-construction and construction phases of the project.

The plan has been developed to provide guidance on:

- Processes to maintain ongoing consultation during with the project's registered Aboriginal parties (RAPs) and Heritage NSW;

- Management procedures for Aboriginal cultural heritage values within, and adjacent to, the project area during pre-construction and construction phases;
- Protocols and procedures for unexpected finds, such as human remains;
- Protocols for undertaking activities in areas that have not been previously assessed; and
- Other administrative requirements, including post-project management of Aboriginal finds and recovered material, ongoing compliance, regular review and update of the ACMP to ensure its functionality is maintained through the project.

A copy of the ACHMP is located in Appendix F

6.3.1 Mitigation and Management

Two project specific mitigation measures are required during the construction phase. These include:

- additional archaeological excavations across the northern of the project area to be implemented following removal of demountable and extant buildings, as presented in Figure 4.2 and methods outlined in Section 4.2.1 and Appendix D; and
- cultural monitoring by RAPs of all construction activities deeper than 1.5 m below current surface, and in accordance with methods outlined in Section 4.2.2 of the ACMP dated 28 March 2022.

A number of ongoing general post-approval heritage requirements are required during construction and operational phases. These are outlined in detail in this section and include the need to implement suitable cultural heritage inductions for all on-site personnel, protocols in the event that unexpected cultural materials are found; and processes in the event that areas outside the approved project area require development activities.

6.3.2 Project specific requirements

The ACHA identified a number of Aboriginal sites and deposits that would be adversely affected by the proposed activity. As such, a range of mitigation requirements are proposed to offset these impacts (Figure 4.1 of the ACHMP). This section outlines the specific activities and timing of these requirements.

6.3.2.1 Additional archaeological excavation

The northern portion of the project area has evidence of cultural deposits (Section 3.3; Figure 3.1 of the ACHMP). These deposits could not be comprehensively investigated as part of the pre-SSDA process due to the extant buildings and demountables currently present on the site. As such additional, archaeological excavations are required during the proposed development to further characterise, and if required salvage (preservation in record) any cultural materials across this zone.

Figure 4.2 of the ACHMP presents the proposed locations of additional investigative archaeological excavations required during the project. The additional test pits have been designed to supplement the archaeological program undertaken during the ACHA, and where construction is newly proposed. Salvage excavations focussing on one or several of these initial test pit locations would be dependent on cultural thresholds being met. The required excavation methods and the thresholds for additional work are outlined in Appendix D of the ACHMP.

In addition to these standard excavation techniques, the following requirements should be met:

- The removal of the demountables and concrete slab/s of any extant buildings proposed for removal in the northern portion of the project area (Figure 4.1 of the ACHMP) should be monitored by a heritage professional and/or RAPs. Guidance should be taken from these monitors to ensure the cultural deposits of interest are minimally affected through any removal, and that the proposed works are stopped to maximise the retention of any cultural deposits prior to the archaeological excavations.
- The archaeological team should consist of three archaeologists and five RAPs (including representatives of the Tweed Byron LALC and McDonald family) with ancillary support provided by the contractor. Ancillary support should consist of a surveyor to peg out the archaeological excavation locations, site hut/porta-loo, access to water, and an excavator for backfilling (as required).

7 Construction Traffic and Pedestrian Management Sub Plan

The site is situated in close proximity to a significant residential population and located adjacent to the main throughfare linking Kingscliff and South Kingscliff. Therefore it is likely that some impacts associated with construction traffic shall occur.

This section details the mitigation measures that will be implemented to ensure road safety and network efficiency during construction in consideration of potential impacts on general traffic, cyclists and pedestrians and bus services, and detail heavy vehicle routes, access and parking arrangements for construction related activities.

7.1 Consent Requirements

In accordance with condition B15(d) of SSD-8378620, repeated in part as follows; the Construction Environmental Management Plan (CEMP) which must include, but is not limited to, the following; the development of a Construction Traffic and Pedestrian Management Sub-Plan.

This section of the CEMP addresses these conditions, outlining the likely impacts associated with construction traffic, the management of civilian traffic during construction activities and the mitigation strategies that will be implemented to ensure that these impacts are minimised.

7.2 Relevant Conditions to Consider

Condition B16 stipulates that during construction, the Applicant must ensure the Construction Traffic and Pedestrian Management Sub-Plan (CTPMSP) must be prepared to achieve the objective of ensuring safety and efficiency of the road network and address, but not be limited to, the following:

- (a) be prepared by a suitably qualified and experienced person(s);
- (b) be prepared in consultation with Council and TfNSW;
- (c) detail the measures that will be implemented to ensure road safety and network efficiency during construction in consideration of potential impacts on general traffic, cyclists and pedestrians and bus services;
- (d) address potential cumulative construction impacts of nearby construction projects, including Tweed Valley Hospital Development and Kingscliff High School Redevelopment, and include provisions to ensure that work activities are coordinated to minimise impacts on the surrounding road network; and
- (e) detail heavy vehicle routes, access and parking arrangements.

Condition B21 and B23, the Applicant must provide sufficient parking facilities on-site, including for heavy vehicles, to ensure that construction traffic associated with the development does not utilise public and residential streets or public parking facilities. Additionally, as per Condition B23 stipulates, the applicant must submit a Construction Worker Transportation Strategy to the Certifier and include details of the provision of sufficient parking facilities or other travel arrangements for construction workers.

7.2.1 Summary of Potential Impacts

Construction of the new site facilities shall see some increase in traffic in the local area. The increased traffic is not predicted to have an impact on local traffic flow and only a minor inconvenience to local road users is expected. Construction vehicle routes have been developed

with the intention of minimising the impact of construction traffic on the local streets in the immediate vicinity. Access to site is anticipated to be primarily via Sutherland Road. The management of construction traffic developed as a result of these works is summarised in the Construction Traffic Management Plan. All construction activities would be carried out with due diligence, duty of care and best management practices.

7.2.2 Mitigation Measures

The following mitigation measures shall be adopted to reduce the impacts on local traffic users and pedestrians during construction:

- Follow the Construction Traffic Management Plan (TMP) based on the detailed construction methodology and use of specific heavy vehicles and construction plant. The Traffic Management Plan is to include measures to minimise traffic impacts ensure public safety and is to be prepared in accordance with:
 - Traffic Control at Work Sites Manual (RTA, 2010)
 - Australian Standard 1742.3 - 2002 Traffic Control Devices for Works on Roads.
- The TMP has been developed in consultation with Tweed Shire Council.
- The TMP details hours of operation, heavy vehicle volumes (numbers) and routes, construction staff parking, loading / unloading areas and site access arrangements, all temporary warning, guidance and information signage, and appropriate traffic control devices
- Notify surrounding land-owners at least one week in advance of the works impacting access to residences
- All vehicles accessing the sites will use the designated access roads
- All roads will be kept clean and free of dust and mud. Where material is tracked onto sealed road, it will be removed so that road pavements are kept safe and trafficable
- All vehicles transporting spoil onsite will be covered and filled to maximum capacity to minimise vehicle movements as required
- All roads, kerbs, gutters and footpaths damaged as a result of construction are to be restored to their pre-construction condition. A dilapidation report has been carried out prior to construction.
- All traffic shall comply with all applicable traffic laws and regulations including speed limits. All construction vehicles shall comply with the speed limits set for the roads accessing the site
- Construction activities shall be restricted to the hours dictated in the Conditions of Consent.

7.2.3 Reporting

All reporting and assessment of compliance shall be conducted as per the specifications listed Sections 1.11 and 1.13 of the Construction Environmental Management Plan.

8 Construction Noise and Vibration Sub-Plan

The management of noise and vibration is to primarily protect the amenity of the neighbour and secondly to avoid environmental degradation of infrastructure.

The management of noise and vibration impacts are achieved through the following measures.

8.1 Consent Requirement

In accordance with condition B15(e) of SSD-8378620, repeated in part as follows; the Construction Environmental Management Plan (CEMP) which must include, but is not limited to, the following; the development of a Construction Noise and Vibration Management Sub-Plan.

This section of the CEMP addresses these conditions, outlining the likely impacts associated with construction activities and the mitigation strategies that will be implemented to ensure that these impacts are minimised.

8.2 Relevant Conditions to Consider

Condition B17 stipulates that during construction, the Applicant must ensure the Construction Noise and Vibration Management Sub-Plan (CNVMSP) must address, but not be limited to, the following:

- (a) be prepared by a suitably qualified and experienced noise expert;
- (b) address the recommendations of the Noise and Vibration Impact Assessment dated 6 May 2021 and prepared by Acoustic Works;
- (c) describe procedures for achieving the noise management levels in EPA's Interim Construction Noise Guideline (DECC, 2009);
- (c) describe the measures to be implemented to manage high noise generating works such as piling, in close proximity to sensitive receivers;
- (d) include strategies that have been developed with the community for managing high noise generating works in close proximity to sensitive receivers;
- (e) include the strategies that have been developed with the community for managing high noise generating works;
- (f) describe the community consultation undertaken to develop the strategies in condition B17(e);
- (g) include a complaints management system that would be implemented for the duration of the construction; and
- (h) include a program to monitor and report on the impacts and environmental performance of the development and the effectiveness of the implemented management measures in accordance with the requirements of condition B14.

8.2.1 Summary of Potential Impacts

Construction of the proposed development will result in short term noise impacts during the construction period. The predicted noise levels during the construction phase have been identified in the project Construction Noise & Vibration Management Plan along with associated mitigation strategies that are to be adopted to minimise these impacts.

8.2.2 Mitigation Measures

The following mitigation strategies listed have been developed to control the level of noise and vibration that affect the relevant stakeholders:

Site construction noise will be managed in accordance Construction Noise and Vibration Management Plan (CNVMP) developed for this project. The CNVMP is based on the proposed construction methodology, activities, durations and equipment type and numbers. The core recommendations taken from this report have also been listed below.

- Keep the community informed in relation to noise intensive activities in the immediate area.
- Provide consultation where prolonged or consecutive periods of construction works are planned.
- Construction activities shall be restricted to the hours dictated in the Conditions of Consent.
- The consent approval stipulates working times to minimise the impact on the community being generally Monday to Friday 7 am-6 pm, Saturday 8 am-1 pm, no work on Sundays or public holidays.
- Rock breaking, rock hammering, sheet piling, pile driving and similar activities may only be carried out between the following hours: (a) 9 am to 12 pm, Monday to Friday; (b) 2 pm to 5 pm Monday to Friday; and (c) 9 am to 12 pm, Saturday
- All permanent and temporary noise attenuation paneling shall be installed prior to commencing demolition or construction activities.
- Construction vehicles (including concrete agitator trucks) do not arrive at the site or surrounding residential precincts outside of the construction hours of work.
- Any noise complaint received will be investigated as soon as practicable. Any practicable and feasible measures to minimise noise will be identified and implemented if required.
- All possible steps to be taken to silence construction equipment where possible.
- Optimum siting of work areas, vehicle and plant parking areas, materials stockpiles and equipment storage areas in locations where potential acoustical impacts will be minimised.
- All plant and machinery used for the project shall be well maintained.
- Ensure workers and contractors are regularly trained (such as toolbox talks) to use equipment in ways to minimise noise.
- “Quacker” reversing alarms to be used for all plant on site where require.
- Vibratory compactors must not be used closer than 30 metres from residential buildings unless vibration monitoring confirms compliance with the vibration criteria.
- Prepare a dilapidation report identifying the condition of all public infrastructure in the vicinity of the site including roads, gutters and footpaths.

8.2.3 Reporting / Compliance

All reporting and assessment of compliance shall be conducted as per the specifications listed Sections 1.11 and 1.13 of the Construction Environmental Management Plan.

9 Construction Waste Management Sub Plan

9.1 Consent Requirement

In accordance with condition B15(f) of SSD-8378620, repeated in part as follows; the Construction Environmental Management Plan (CEMP) which must include, but is not limited to, the following; the development of a Construction Waste Management Sub-Plan.

This section of the CEMP addresses these conditions, outlining the likely impacts associated with construction activities and the mitigation strategies that will be implemented to ensure that these impacts are minimised.

9.2 Relevant Conditions to Consider

Condition C18 stipulates that during construction, the Applicant must ensure The Construction Waste Management Sub-Plan (CWMSP) must address, but not be limited to, the procedures for the management of waste including the following:

- (a) the recording of quantities, classification (for materials to be removed) and validation (for materials to remain) of each type of waste generated during construction and proposed use;
- (b) details of diverting waste from landfill (where appropriate);
- (c) information regarding the recycling and disposal locations; and
- (d) confirmation of the contamination status of the development areas of the site based on the validation results.

9.2.1 Summary of Potential Impacts

It is likely that some excess building materials will be produced due to the construction work such as miscellaneous waste associated with packaging and transport of plant and equipment and various other manufactured items forming part of the augmentation works. Waste generated as a result of construction will be minimised, recycled, reused or recovered, where practical.

The strategy for reducing the waste on the project will be made up of three strategies as detailed below in order of priority. The prime objective is to keep the amount of materials transferred to landfill from this project to the minimum possible amount.

9.2.2 Mitigation Measures

The following mitigation strategies listed have been developed to assist in reducing waste on the project and tracking all waste generated onsite. The measures include:

- Reduce the amount of waste material produced on the project by ensuring that only enough materials required to perform the works are ordered.
- Stage the delivery of construction materials to reduce the potential of loss / waste due to damage prior to usage.
- Any excess materials from particular work areas are to be retained and incorporated into other work areas where practical.
- Provision of information on waste management shall be communicated through the induction process and via toolbox talks.
- Generate a waste tracking register for the site that includes:
 - Who transported the waste (company name, ABN, vehicle registration and driver details, date and time of transport, description of waste)
 - Copies of waste dockets/receipts for the waste facility (date and time of delivery, name and address of the facility, it's ABN, contact person).

- The construction contractor to ensure that waste generated by the works is transported to a place that can lawfully accept it as per Section 143 of the Protection of the Environment Operations Act 1997.

9.2.3 Reporting / Compliance

All reporting and assessment of compliance shall be conducted as per the specifications listed Sections 1.11 and 1.13 of the Construction Environmental Management Plan.

10 Construction Soil and Water Management Sub Plan

The management of soil and water is to primarily avoid environmental degradation of the localised area.

The management of stormwater impacts, and the minimisation of soil degradation are achieved through the following measures.

10.1 Consent Requirements

In accordance with condition B15(g) of SSD-8378620, repeated in part as follows; the Construction Environmental Management Plan (CEMP) which must include, but is not limited to, the following; the development of a Construction Soil and Water Management Sub-Plan.

This section of the CEMP addresses these conditions, outlining the likely impacts associated with stormwater runoff and the mitigation strategies that will be implemented to ensure that these impacts are minimised.

10.2 Relevant Conditions to Consider

Condition C23 stipulates that during construction, the Applicant must ensure that adequate provisions must be made to collect and discharge stormwater drainage during construction to the Certifier. The prior written approval of Council must be obtained to connect or discharge site stormwater to Council's stormwater drainage system or street gutter.

To meet this condition, RCC must design an operational stormwater management system as per Condition B19 for the development and submit it to the satisfaction of the Certifier. The system must:

- (a) be designed by a suitably qualified and experienced person(s);
- (b) measures to ensure that sediment and other materials are not tracked onto the roadway by vehicles leaving the site;
- (c) describe all the erosion and sediment controls to be implemented during construction, including as a minimum measures in accordance with the publication Managing Urban Stormwater Soils & Construction (4th edition, Landcom 2004) commonly referred to as the 'Blue Book'
- (d) include an Acid Sulfate Soils Management Plan including measures for the management, handling, treatment and disposal of acid sulfate soils, including monitoring of water quality at acid sulfate soils treatment areas as set out in Section 13 of the Detailed Site Investigation for Contamination Far North Coast Schools project Kingscliff Public School, 12 Orient Street, Kingscliff NSW 2487, dated August 2001 and prepared by Douglas Partners; and
- (e) provide a plan of how all construction works will be managed in a wet – weather event (i.e. storage of equipment, stabilisation of the site);
- (f) detail all off-site from the site; and
- (g) describe the measures that must be implemented to manage stormwater and flood flows for small and large sized events including, but not limited to 1 in 5 year ARI.

10.2.1 Summary of Potential Impacts

Earthworks and general ground disturbances associated with the site works may result in sediment and other materials leaving the site via wind or water movement. This may have the potential to result in the water pollution such as turbidity and nutrient inputs, should sediment wash

into stormwater or natural drainage lines. Aspects of the site identified as potentially impacting on water quality include the excavation for foundations and site levelling, stockpiling and transportation of excess spoil and general construction waste entering drainage lines.

10.2.2 Mitigation Measures

The following mitigation measures shall be adopted to reduce the impacts associated with soil degradation and water quality:

- Construction is to be undertaken in accordance with the Erosion and Sediment Control Plan.
- All erosion and sediment control devices shall be properly maintained for the duration of the work. All structures are to be inspected after rain events and sediment to be removed
- Any temporary stockpiles should be stabilised using sediment fencing or similar.
- All fuels and other hazardous liquids shall be stored at designated construction compounds
- All chemicals used for construction shall be stored and used in accordance with the relevant Safety Data Sheets.
- An emergency spill kit shall be kept at the construction compound.
- Workers are to be made aware of the provisions of Section 120 of the POEO Act with regards to water pollution
- Notification to the EPA in accordance with Part 5.7 of the POEO Act is to be undertaken where a pollution incident occurs
- Construction vehicles shall be appropriately cleaned of any soil or mud prior to leaving each works site at dedicated wash down bays
- “Clean” stormwater shall be diverted around the site where possible
- All existing stormwater pits and drains subject to RCC construction works will be silt protected with geo-fabric and/or granular socks. Drains will be monitored and maintained by RCC
- Stockpiles to be established at RCC approved locations
- Sediment fences shall be installed at required locations at the perimeter of the site as per the Erosion and Sediment Control Plan
- Stormwater shall be diverted to retention basins
- The location and details of permanent controls shall be included on the Site Layout Plan
- Erosion and sediment controls shall be inspected as part of the weekly Site Inspections

10.2.3 Reporting / Compliance

All reporting and assessment of compliance shall be conducted as per the specifications listed Sections 1.11 and 1.13 of the Construction Environmental Management Plan.

11 Construction Biodiversity Management Sub Plan

The management of biodiversity is to primarily avoid degradation of ecosystems the localised area.

The management of biodiversity, and the minimisation of impact on local ecosystems are achieved through the following measures.

11.1 Consent Requirements

In accordance with condition B15(g) of SSD-8378620, repeated in part as follows; the Construction Environmental Management Plan (CEMP) which must include, but is not limited to, the following; the development of a Construction Biodiversity Management Sub-Plan.

This section of the CEMP addresses these conditions, outlining the likely impacts associated with disturbance of local ecosystems and the mitigation strategies that will be implemented to ensure that these impacts are minimised.

11.2 Relevant Conditions to Consider

To meet condition B20, RCC must operate under a Biodiversity Management Sub-Plan for the development and submit it to the satisfaction of the Certifier. The Biodiversity Management Sub-Plan (BMSP) must address, but not be limited to, the following:

- (a) be prepared by a suitably qualified and experienced person/s;
- (b) identify areas of land where impacts on biodiversity are to be avoided as outlined in the biodiversity development assessment report prepared by Kleinfelder dated 6 May 2021 and set out how these areas will be protected from construction impacts; and,
- (c) set out the measures identified in the Biodiversity Development Assessment Report to minimise, mitigate and manage impacts on biodiversity, including timing and responsibility for delivery of the measures Summary of Potential Impacts

Construction works and general disturbances associated with the Project may result in the disturbance of native flora and fauna.

11.2.1 Mitigation Measures – Vegetation

There are no threatened vegetation communities or flora in the KPS Development Site but management of the existing areas containing native vegetation is necessary. Measures include:

- Clearing limits will be clearly marked and all site personnel made aware of Exclusion Zones.
- Trees to be retained on site will be protected with a protective barrier (e.g., paraweb fencing) so that stockpiling, parking of vehicles and other construction activities do not occur within the dripline of trees.
- A tree protection zone (TPZ) will be established around trees to be retained. The TPZ will extend from the dripline of trees and be erected for the duration of works.
- Native vegetation cleared from the site shall be mulched and used for revegetation, erosion protection or landscaping works.
- Weed species shall be disposed of offsite at a nearby legally operating landfill site.
- Trees to be retained shall be clearly identified for preservation and temporarily protected by “paraweb” fencing placed not less than 3 metres clear of trees where possible, as some retained trees may be less 3 metres from new and refurbished buildings. There will be no stockpiling or parking of plant/machinery 3 metres from this area.
- Limits of the site clearing shall ne marked by temporary fencing.

- No vegetation shall be burnt.
- All trees and stumps on or within the limits of clearing which are unable to be removed by clearing methods, shall be removed by grubbing.
- Vegetation where practical shall be retained to the greatest extent.
- Contact shall be made with a trained wildlife handler/ ecologist 2 weeks prior to the commencement of clearing operations to allow them to prepare for the clearing and construction period.

11.2.2 Mitigation Measures - Fauna

Although no threatened fauna is likely to be impacted by the development, foraging and nesting habitat for birds, foraging habitat for insectivorous bats (including the vulnerable Little Bent-winged Bat) and general habitat for ground dwelling reptiles could be disturbed. Management measures shall include:

- Preclearing surveys shall be conducted by the project ecologist and are to include the following procedures:
 - The pre-clearing survey should be within two weeks of the start of construction.
 - The project ecologist will inspect vegetation within the clearing footprint and advise the site manager and tree clearing staff of any habitat potential and precautions necessary during vegetation removal.
 - The ecologist will inspect for active nests of passerine birds in trees and shrubs that will be removed or trimmed, roosting or nests for Bush Stone-curlews in gardens or areas with understorey, and inspect the lawn areas for ground nesting birds such as the Masked Lapwing (*Vanellus miles*).
 - Active nests in the areas to be cleared shall be marked and discussions between the Ecologist and building contractor to determine the most appropriate actions.
 - Inspect gardens for reptiles.
 - Ceiling spaces of buildings to be refurbished, if the ceilings are being removed, should be inspected for use by insectivorous bats, possums or snakes (primarily pythons).
 - A report of the findings and recommendations from the pre-clearance survey shall be delivered by the ecologist to the construction contractor.
 - The pre-clearing survey results and report will determine if an ecologist will be required for any clearing of native vegetation.
- Removal of trees and shrubs:
 - If required, an Ecologist will be onsite where it has been determined necessary by the pre-clearing survey.
 - During any clearing, the ecologist should rescue and relocate any fauna impacted by the clearing activities to a section of the KPS school grounds with suitable habitat that will not be further disturbed.
 - If any injured or displaced fauna are encountered onsite in the absence of an ecologist or licensed wildlife carer, the advice of the ecologist and/or a local wildlife rescue group will be sought immediately.
 - During site inductions, all contractors, sub-contractors, and personnel must be notified of these vegetation protection requirements.

11.2.3 Reporting / Compliance

All reporting and assessment of compliance shall be conducted as per the specifications listed Sections 1.11 and 1.13 of the Construction Environmental Management Plan.

12 Tree Protection

12.1 Consent Requirements

In accordance with condition C19 of SSD-8378620, Tree protection is to be implemented as follows:

- (a) street trees must not be trimmed or removed unless it forms a part of this development consent or prior written approval from Council is obtained or is required in an emergency to avoid the loss of life or damage to property;
- (b) all street trees immediately adjacent to the approved disturbance area / property boundaries must be protected at all times during construction in accordance with Council's tree protection requirements. Any street tree, which is damaged or removed during construction due to an emergency, must be replaced, to the satisfaction of Council;
- (c) all trees on the site that are not approved for removal must be suitably protected during construction as per the recommendations of the Arboricultural Impact Assessment prepared by Treescience dated May 2021 as amended by the Addendum to the Arboricultural Impact Assessment, prepared by Arbor Ecological and dated 26 August 2021; and
- (d) if access to the area within any protective barrier is required during the works, it must be carried out under the supervision of a qualified arborist. Alternative tree protection measures must be installed, as required. The removal of tree protection measures, following completion of the works, must be carried out under the supervision of a qualified arborist and must avoid both direct mechanical injury to the structure of the tree and soil compaction within the canopy or the limit of the former protective fencing, whichever is the greater.

13 References

Environmental Planning and Assessment Act 1979 No 203

Environmental Planning and Assessment Regulation 2000

Protection of the Environment Operations Act 1997 (NSW)

Protection of the Environment Operations (General) Regulation 2009

ISO 14001; 2015 Environmental management systems - Requirements with guidance for use
AS/NZS ISO 31000:2009 Risk management – Principles and guidelines

NSW Government Environmental Management System Guidelines (edition 3 - August 2013)

Appendix A – Construction Soil and Water Management Sub Plan

Appendix B – Construction Waste Management Sub Plan

Appendix C– Construction Noise and Vibration Management Sub Plan

Appendix D – Construction Traffic and Pedestrian Management Sub Plan

Appendix E – Construction Biodiversity Management Sub Plan

Appendix F –Aboriginal Heritage - Heritage NSW Response

Appendix G – Aboriginal Heritage Impact Permit
(AHIP number: 4857)